

Professional Panel & Linear Light

Catalogue (2019-2020)



DOLIGHT OPTOELECTRONICS TECHNOLOGY CO.,LTD.
惠州市恒途光电科技有限公司

Email: super.do@dolight-led.com

Mobile: +86-139 2831 6373
Tel: +86 (0)752-531 2830 / +86 (0)752-531 2831

Fax: +86 (0)752-531 2833

www.dolight-led.com

Add: Floor 4, Building C Tianmin Industrial Area,
Zhongkai hightec Zone, Huizhou city, 516006,
Guangdong province, China



DOLIGHT OPTOELECTRONICS TECHNOLOGY CO.,LTD.



COMPANY PROFILE

Dolight Optoelectronics Technology CO., LTD. was founded to focus on LED business since June of 2014 in Huizhou City Guangdong, which is 1.5 hours way from Shenzhen.

Since 2014 Dolight is dedicated into LED panel products and offers customer the wide range panel products and application choice such as Classic panel (100-130LM/W), UGR<19 panel, IP65 & IP54 panel, Narrow frame panel, linear panel CCT adjustable panel, RGBW Wall, LENS Panel, pendant lighting fixtures and 3D frameless panel. During 2018, Dolight continue its innovation and has successfully launched Trunk linear light for new installation and retrofit installation specially used in the industrial area, and all the aluminium profiles of all kinds for indoor used. In 2019, Dolight developed Linear profile series. Reflector linear light, Opal linear light, LENS linear light and wallwash linear light.

Dolight has passed ISO9001. All the products has passed SAA, RoHS, TUV listed CE and CB certificates and some products passed UL.

Just Do Light, Just Dolight

Dolight's production area is 5000 SQMS and owns 70 employees.

Dolight is and will persist in offering high and consistent quality products to customers while keeps all the flexibility to meet market special requirement and customized OEM, ODM service. Innovation and creation on the new products are our philosophy. All of these achievements benefit from senior team which has more than 15 years experience.

Through unremitting efforts, Dolight products are highly recognized in Europe and other regions, such as Germany, Swiss, France, Italy, Poland, Singapore, South Africa, etc. Dolight could not offer your cheapest products; contrarily we will offer you price and quality balanced products; Dolight could not 100% satisfy your requirement, contrarily we keep mind open and will try all the best to achieve your reasonable goal; So choose Dolight, choose your right partner! It is our pleasure to grow and glow together with our dear customer! Let's do something together in the LED lighting world!

COMPANY CERTIFICATES



ISO9001



SAA



CE



CE



CE



CE



CE



RoHS



IP65 Waterproof
Test Report



TUV listed CB



TUV listed CE



TUV listed CE



Patent



Patent



Patent



Patent



Patent



Patent



Patent



Patent

Why Choose Dolight?

Since 2014
Reliable supplier

Dolight is persist in offering customers top and consistent quality products.

Dedicated in LED panel and linear light ,Focus on Mid-high end market.

Quality Oriented

Focus

Flexible

Dolight is flexible to offer OEM and ODM service.

Innovation

Keeping innovation on new products!

Experienced

More than 15 years experience in LED world.

Quick Action

Offering solution and design in short time.

LED Panel Light P. 06



P. 06 Clear LED panel	P. 08 Backlite LED Panel	P. 10 Grille LED Panel UGR<16	P. 12 Reflector Mould UGR<18.1
P. 14 LENS LED Panel	P. 16 Pro Panel Series	P. 18 UGR<19 Pro Panel Series	P. 20 M LED Panel Series
P. 22 UGR<19 M LED Panel Series	P. 24 Surface Mount LED Panel Series	P. 26 Clip-in Panel Series	P. 28 Classic IP65 Panel Light
P. 30 IP65 Antibacterial Panel Series	P. 32 Sensor Panel Light Series	P. 34 Frameless Panel Series	P. 36 Narrow Frame Panel Series
P. 38 Deco Frame Panel	P. 40 RGBW Panel Series	P. 42 CCT Tunable Panel Series	

Linear Panel Light P. 44




P. 44 Linear Narrow Frame Panel Series	P. 46 3D Linear Frameless Panel Series
---	---

Pendant Light P. 48



P. 48 UGR<19 Pendant Light Series	P. 50 3D Frameless Pendant Light Series
--	--

LED Trunk System P. 52


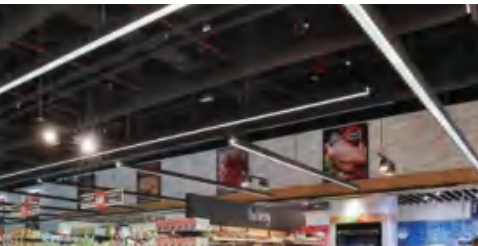


P. 52 Pro Trunk Lens Version (New Installation)	P. 54 Pro Trunk Frosted Cover (New Installation)	P. 56 Retrofit Trunk Lens Version	P. 58 Retrofit Trunk Frosted Cover
--	---	--	---

LED Linear Profile P. 60



P. 60 L55 Suspension Reflector	P. 62 L55 Suspension Opal	P. 64 L55 Recessed Reflector	P. 66 L55 Recessed Opal
P. 68 L50 Daisy Linear	P. 70 L40 LENS Linear	P. 72 L30 LENS Linear	P. 74 L50 Net Linear
P. 76 L50 Wallwash Light	P. 78 L50 Circle Linear		

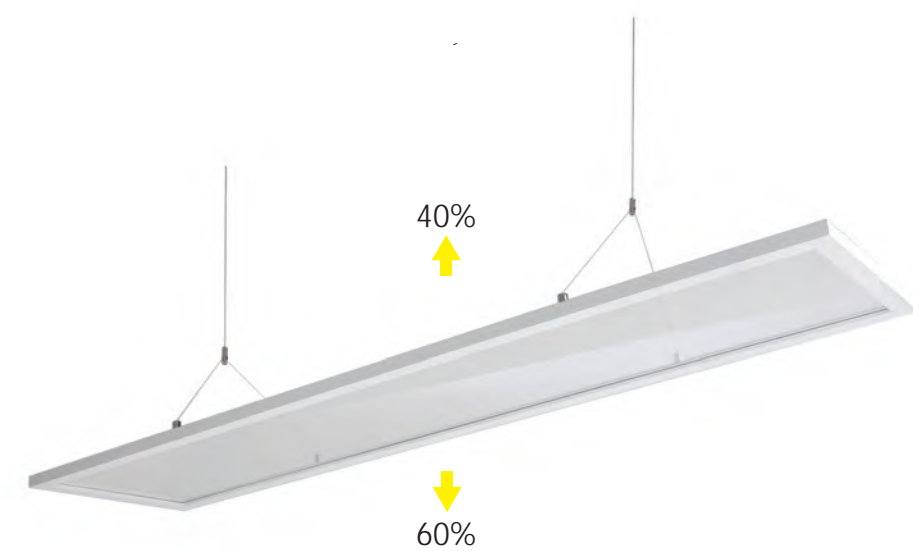

Clear LED panel Series

- Elegant transparent design;
- Up/Down lighting, up 40%, down 60%;
- High efficiency up to 100lm/W, 120lm/W;
- Uniform and soft lighting;
- UGR<19, eyes friendly version optional;
- Strong aluminium body;
- Helvar sensor built in;

INSTALLATION ACCESSORY



Driver box
Suspension kits




Base
suspension kits

SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWC13012036	36W	3600lm	295x1195x17.5mm	100lm/w	<22/ <19
DWC13015045	45W	4500lm	295x1495x17.5mm	100lm/w	<22/ <19
DWC13012036B	36W	4320lm	295x1195x17.5mm	120lm/w	<22/ <19
DWC13015045B	45W	5400lm	295x1495x17.5mm	120lm/w	<22/ <19

PHOTOMETRIC DATA






No yellowing
& competitive
price

IP44
IP40



Seamless Corner

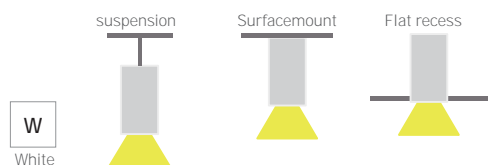

Backlite LED Panel Series

- Competitive price;
- No LGP inside, no yellowing;
- 3 Years Warranty;
- Optical lens design;
- Uniform light distribution;
- Slim thickness 26mm;
- 100lm/W or 120lm/W;
- UGR<19 Optional;
- IP44 version optional;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips




surfacemount frame





SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWBUGR606030H	30W	3600lm	595x595x30mm	120lm/W	<19
DWBUGR3012030H	30W	3600lm	295x1195x30mm	120lm/W	<19
DWB303018	18W	1440lm	295x295x30mm	80lm/W	<19
DWB606040	40W	4000lm	595x595x30mm	100lm/W	<22
DWB3012040	40W	4000lm	295x1195x30mm	100lm/W	<22
DWB6012060	60W	5400lm	295x1195x30mm	100lm/W	<22

PHOTOMETRIC DATA




DIMENSIONS

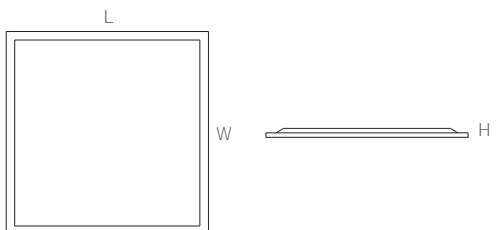



CCT Tunable
UGR<16

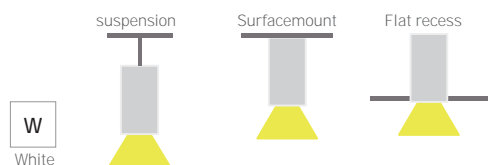

Grille LED Panel UGR<16

- Classic flavor grille LED Panel;
- Lower glare UGR<16, all the value is lower than 19;
- 130lm/W or 140lm/W;
- More accurate light distribution control;
- CCT Tunable optional;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.



Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWR606036	36W	4680lm	595x595x26.8mm	130lm/W	<16
DWR626236	36W	4680lm	620x620x26.8mm	130lm/W	<16
DWR3012036	36W	4680lm	295x1195x26.8mm	130lm/W	<16

* Note: UGR value is caculated based on the light emitting surface, not the panel size.

PHOTOMETRIC DATA




DIMENSIONS

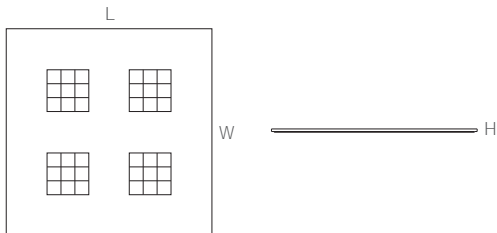



CCT Tunable
LED module
changeable




LED Module
Changeable




2 Modules



3 Modules



4 Modules

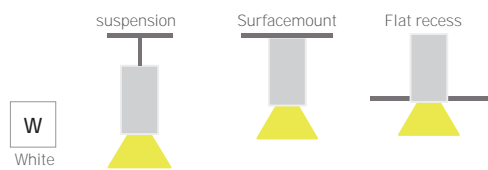

Reflector Mould LED Panel Light UGR<18.1

- LED module changeable;
- Classic flavor grille design;
- 120lm/W;
- Frosted cap offers soft light;
- UGR<18.1;
- CCT Tunable optional;
- Silver / White reflector optional;
- 2, 3, 4 modules for 595X595mm optional ;
- 2, 4 modules for 295x1195mm optional;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.



Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWC606036H	36W	4320lm	595x595x21.8mm	120lm/W	<18.1
DWC626236H	36W	4320lm	620x620x21.8mm	120lm/W	<18.1
DWC3012036H	36W	4320lm	295x1195x21.8mm	120lm/W	<18.1
DWC606036	36W	3860lm	595x595x21.8mm	110lm/W	<18.1
DWC626236	36W	3860lm	620x620x21.8mm	110lm/W	<18.1
DWC3012036	36W	3860lm	295x1195x21.8mm	110lm/W	<18.1

* Note: UGR value is caculated based on the light emitting surface, not the panel size.

PHOTOMETRIC DATA




DIMENSIONS

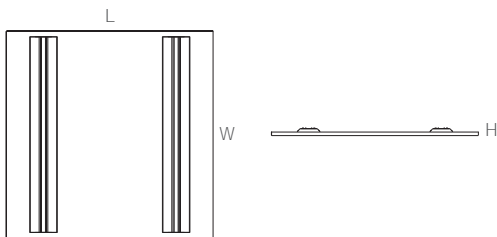





LENS Panel
140lm/W
UGR<17

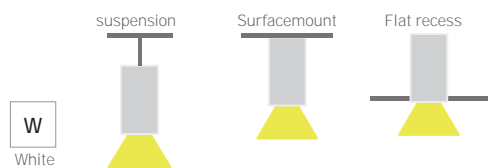

LENS LED Panel Series

- Revolutionary LENS design to offer 140lm/W high efficiency lighting output;
- No LGP inside, most reliable panels, 5 years warranty;
- Lower glare UGR<17;
- Different beam angle from 60°, 90°, to asymmetric 25°;
- LED **SAMSUNG**



INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.



Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWL606030H	30W	4200lm	595x595x21.6mm	140lm/W	<19
DWL626230H	30W	4200lm	620x620x21.6mm	140lm/W	<19
DWL3012030H	30W	4200lm	295x1195x21.6mm	140lm/W	<19
DWL606030	30W	3600lm	595x595x21.6mm	120lm/W	<19
DWL626230	30W	3600lm	620x620x21.6mm	120lm/W	<19
DWL3012030	30W	3600lm	295x1195x21.6mm	120lm/W	<19

* Note: UGR value is calculated based on the light emitting surface, not the panel size.

PHOTOMETRIC DATA




DIMENSIONS

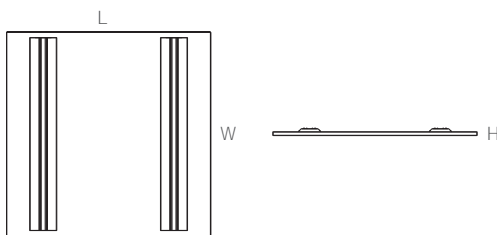



Quality
Oriented

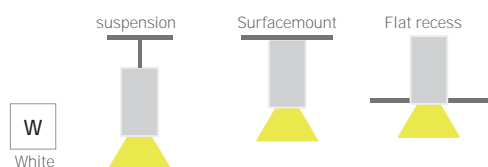

Pro Panel Series

- Designed for professional market;
- PMMA LGP, no worry on yellowing;
- High efficiency: 130lm/W, 120lm/W, 100lm/W;
- Anti-twisted frame with seamless corner;
- Uniform light distribution to offer pure and clean light to end users;
- RA90 and one binning **SAMSUNG** LED optional;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWP606036H	36W	4680lm	595x595x10.5mm	130lm/W
DWP626236H	36W	4680lm	620x620x10.5mm	130lm/W
DWP3012036H	36W	4680lm	295x1195x10.5mm	130lm/W
DWP606036B	36W	4320lm	595x595x10.5mm	120lm/W
DWP626236B	36W	4320lm	620x620x10.5mm	120lm/W
DWP3012036B	36W	4320lm	295x1195x10.5mm	120lm/W
DWP606036	36W	3600lm	595x595x10.5mm	100lm/W
DWP626236	36W	3600lm	620x620x10.5mm	100lm/W
DWP3012036	36W	3600lm	295x1195x10.5mm	100lm/W
DWP60603648	48W	4800lm	595x595x10.5mm	100lm/W
DWP62623648	48W	4800lm	620x620x10.5mm	100lm/W
DWP3012048	48W	4800lm	295x1195x10.5mm	100lm/W
DWP6012060	60W	6000lm	595x1195x12mm	100lm/W


* If you want to choose high quality LED panel, Dolight LED panel will be your best choice!





PHOTOMETRIC DATA



DIMENSIONS

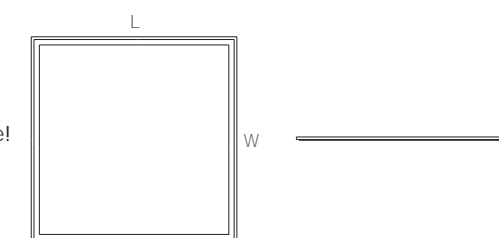

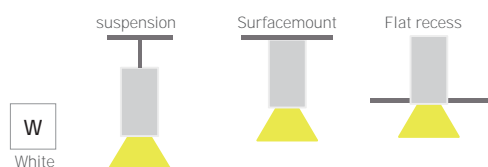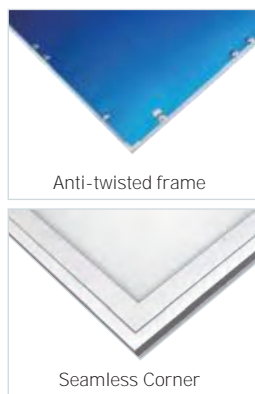

UGR<19 Pro Panel Series

- UGR<19, Special used in school, office;
- Designed for professional market;
- PMMA LGP, no worry on yellowing;
- High efficiency:120lm/W,100lm/W;
- Anti-twisted frame with seamless corner;
- Uniform light distribution to offer real pure and clean light to end users;
- RA90 and one binning **SAMSUNG** LED optional;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWUGR606036B	36W	4320lm	595x595x10.5mm	120lm/W	<19
DWUGR626236B	36W	4320lm	620x620x10.5mm	120lm/W	<19
DWUGR3012036B	36W	4320lm	295x1195x10.5mm	120lm/W	<19
DWUGR606036	36W	3600lm	595x595x10.5mm	100lm/W	<19
DWUGR626236	36W	3600lm	620x620x10.5mm	100lm/W	<19
DWUGR3012036	36W	3600lm	295x1195x10.5mm	100lm/W	<19
DWUGR60603648	48W	4800lm	595x595x10.5mm	100lm/W	<19
DWUGR62623648	48W	4800lm	620x620x10.5mm	100lm/W	<19
DWUGR3012048	48W	4800lm	295x1195x10.5mm	100lm/W	<19
DWUGR6012060	60W	6000lm	595x1195x12mm	100lm/W	<19


* If you want to choose high quality LED panel,
Dolight LED panel will be your best choice!



PHOTOMETRIC DATA




DIMENSIONS

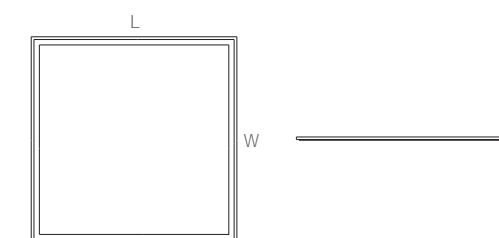



Price Sensitive

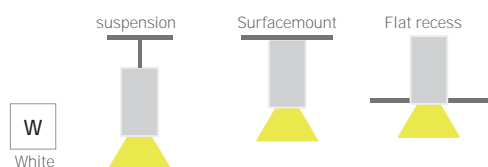

M LED Panel Series

- Best price and quality balanced panels;
- PS LGP;
- High efficiency:100lm/W ,120lm/W ;
- Anti-twisted frame with seamless corner;
- Uniform light distribution;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWP606036M	36W	3600lm	595x595x10mm	100lm/W
DWP3012036M	36W	3600lm	295x1195x10mm	100lm/W
DWP626236M	36W	3600lm	620x620x10mm	100lm/W
DWP606036HM	36W	4320lm	595x595x10mm	120lm/W
DWP3012036HM	36W	4320lm	295x1195x10mm	120lm/W
DWP626236HM	36W	4320lm	620x620x10mm	120lm/W


* If you want to choose high quality LED panel,
Dolight LED panel will be your best choice!



PHOTOMETRIC DATA



DIMENSIONS

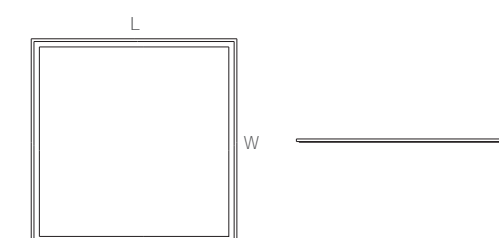




Price Sensitive
UGR<19



Anti-twisted frame

Seamless Corner

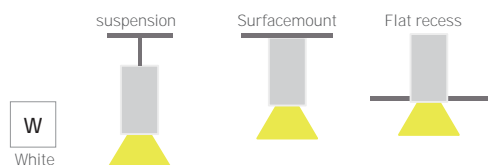

UGR<19 M LED Panel Series

- UGR<19, special used in school, office;
- Best price and quality balance panels;
- PS LGP;
- High efficiency:100lm/W, 120lm/W;
- Anti-twisted frame with seamless corner;
- Uniform light distribution;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips



surfacemount frame




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWUGRP606036M	36W	3600lm	595x595x10mm	100lm/W	<19
DWUGRP3012036M	36W	3600lm	295x1195x10mm	100lm/W	<19
DWUGRP626236M	36W	3600lm	620x620x10mm	100lm/W	<19
DWUGRP606036HM	36W	4320lm	595x595x10mm	120lm/W	<19
DWUGRP3012036HM	36W	4320lm	295x1195x10mm	120lm/W	<19
DWUGRP626236HM	36W	4320lm	620x620x10mm	120lm/W	<19

* If you want to choose high quality LED panel,
Dolight LED panel will be your best choice!

PHOTOMETRIC DATA




DIMENSIONS

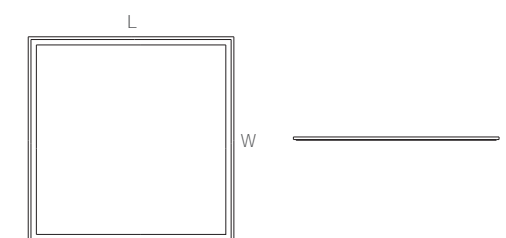




Price Sensitive
UGR<19



Surface Mount LED Panel Series

- Surface mounted directly offers easy installation and saves cost from Panel+surface mount kits;
- High efficiency:100lm/W, 120lm/W, 130lm/W;
- Anti-twisted frame with seamless corner;
- Uniform light distribution;
- UGR<19 optional;

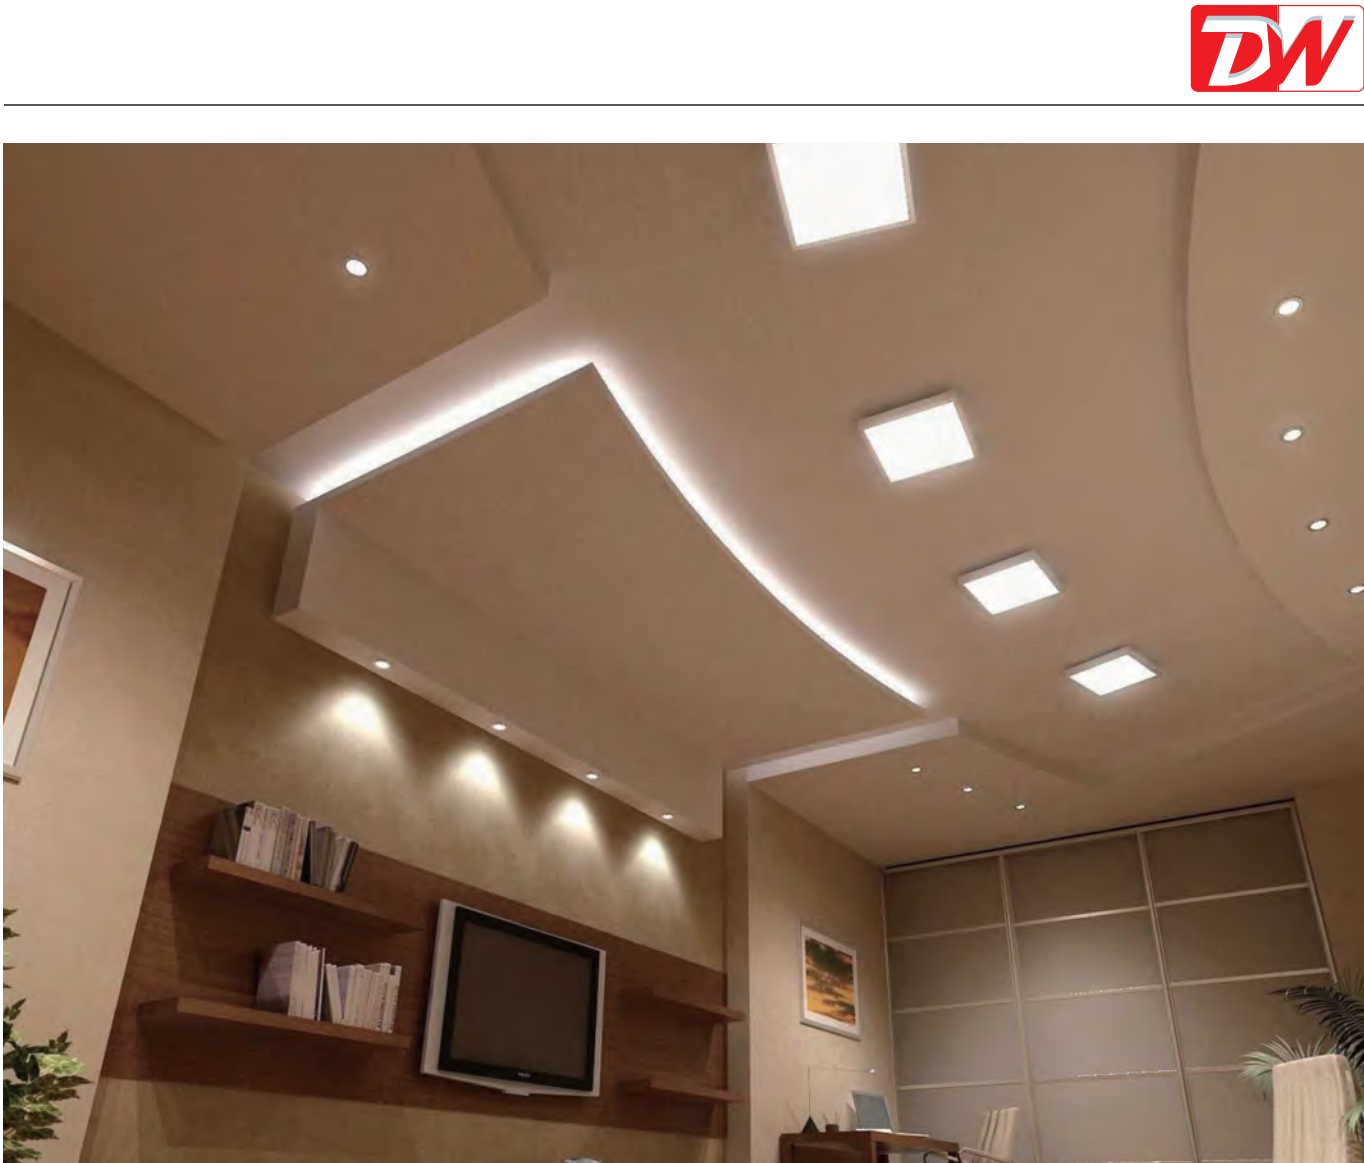


SPEC.



Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWP606036BCS	36W	4320lm	595x595x40mm	120lm/W
DWP626236BCS	36W	4320lm	620x620x40mm	120lm/W
DWP3012036BCS	36W	4320lm	295x1195x40mm	120lm/W
DWP303018CS	18W	1620lm	295x295x40mm	100lm/W
DWP306036CS	36W	3600lm	295x595x40mm	100lm/W
DWP606036CS	36W	3600lm	595x595x40mm	100lm/W
DWP626236CS	36W	3600lm	620x620x40mm	100lm/W
DWP3012036CS	36W	3600lm	295x1195x40mm	100lm/W


* If you want to choose high quality LED panel, Dolight LED panel will be your best choice!

PHOTOMETRIC DATA





DIMENSIONS

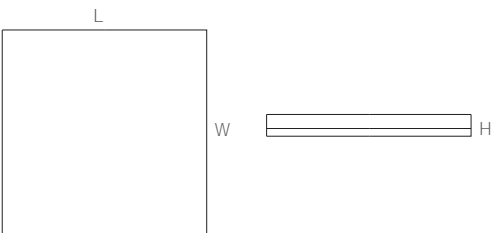



Clip-in Panel Series

- Used in the clip in ceiling system;
- High efficiency:100lm/W, 120lm/W, 130lm/W;
- Anti-twisted frame with seamless corner;
- Uniform light distribution;
- UGR<19 optional;

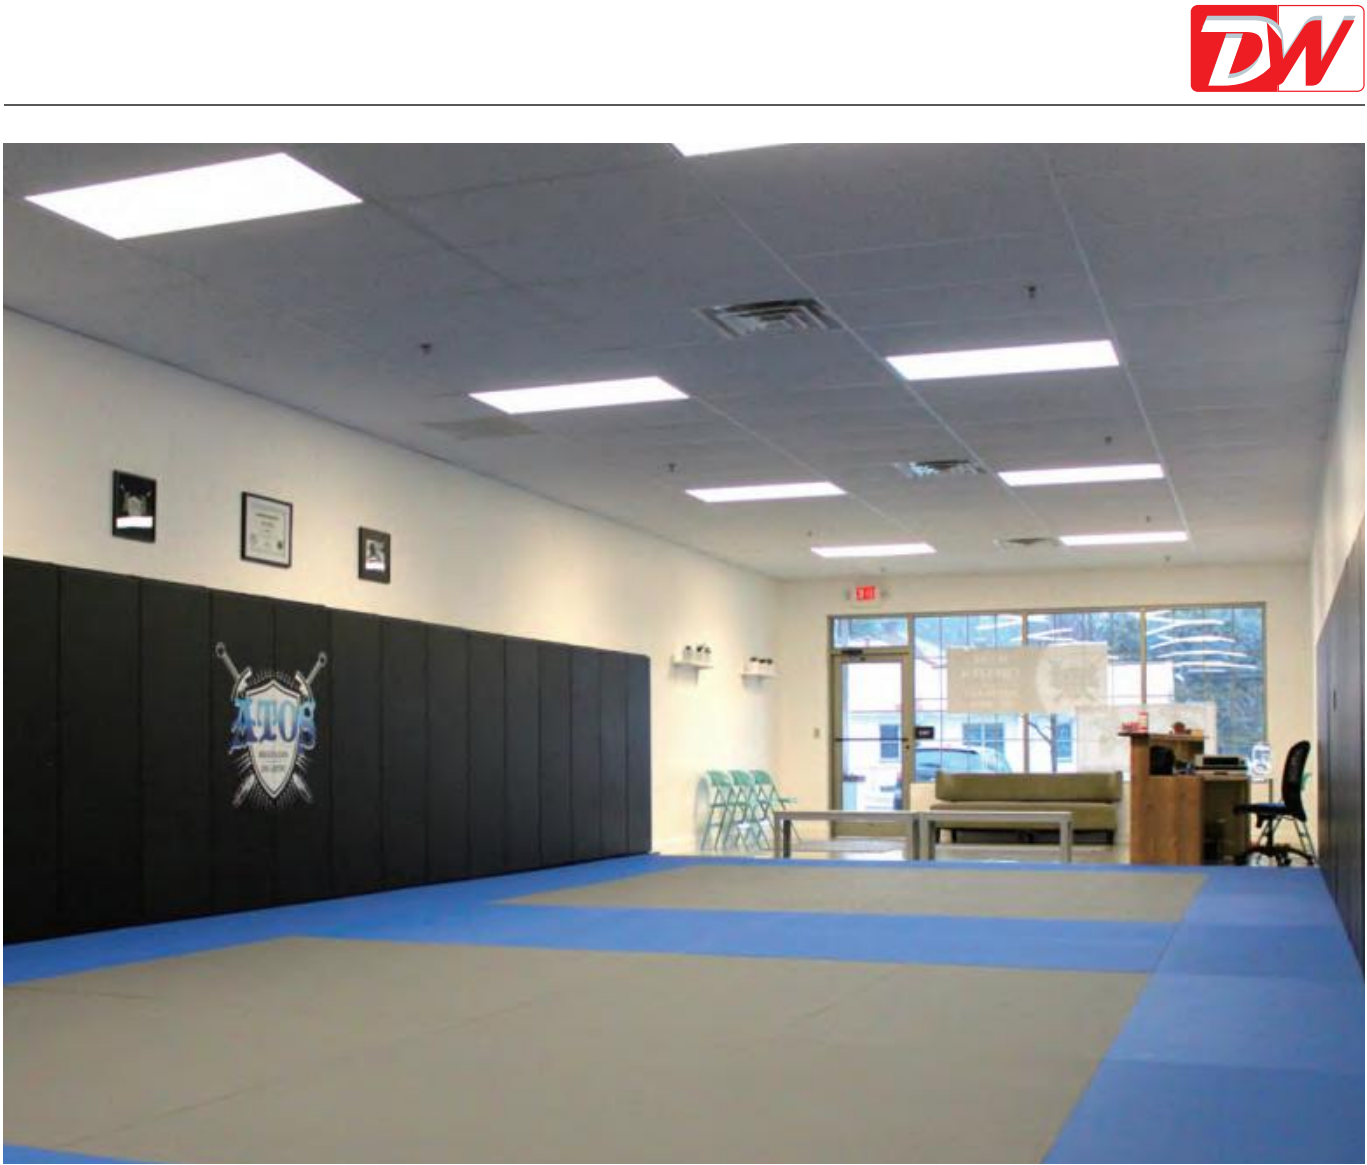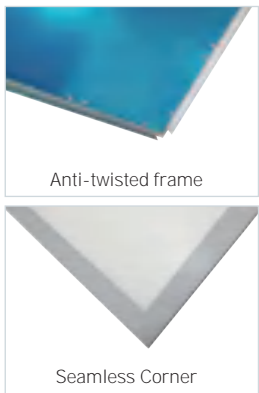


SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWP606036CH	36W	4680lm	600x600x20.8mm	130lm/W
DWP626236CH	36W	4680lm	625x625x20.8mm	130lm/W
DWP3012036CH	36W	4680lm	300x1200x20.8mm	130lm/W
DWP606036CB	36W	4320lm	600x600x20.8mm	120lm/W
DWP626236CB	36W	4320lm	625x625x20.8mm	120lm/W
DWP3012036CB	36W	4320lm	300x1200x20.8mm	120lm/W
DWP303018C	18W	1620lm	300x300x20.8mm	100lm/W
DWP306036C	36W	3600lm	300x600x20.8mm	100lm/W
DWP606036C	36W	3600lm	600x600x20.8mm	100lm/W
DWP626236C	36W	3600lm	625x625x20.8mm	100lm/W
DWP3012036C	36W	3600lm	300x1200x20.8mm	100lm/W


* If you want to choose high quality LED panel, Dolight LED panel will be your best choice!




PHOTOMETRIC DATA



DIMENSIONS

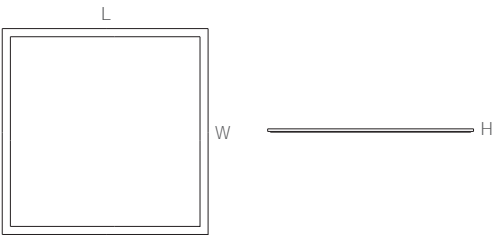

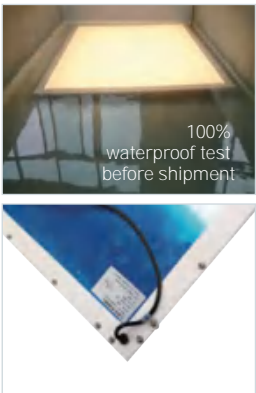

Classic IP65 Panel Light Series

- Front face+backside+driver, whole fixture IP65, totally Waterproof and dust proof;
- PS diffuser, glow wire test 650°C; PC diffuser, glow wire test 850°C; 5 years warranty;
- Special used in the factory, clean room, pharmaceutical factory, hospital operating room;
- IP54 version is optional, front surface is IP65, backsize and driver is IP40;
- IP65 test report, IK07 test report, clean room test report is available;
- UGR<19 optional

INSTALLATION ACCESSORY



Suspension kits



Recessed clips




surfacemount frame




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWIP606036	36W	3600lm	595x595x10mm	100lm/W
DWIP626236	36W	3600lm	620x620x10mm	100lm/W
DWIP3012036	36W	3600lm	295x1195x10mm	100lm/W
DWIP606048	48W	4500lm	595x595x10mm	100lm/W
DWIP626248	48W	4500lm	620x620x10mm	100lm/W
DWIP3012048	48W	4500lm	295x1195x10mm	100lm/W
DWIP606036E	36W	3600lm	595x595x10mm	100lm/W
DWIP626236E	36W	3600lm	620x620x10mm	100lm/W
DWIP3012036E	36W	3600lm	295x1195x10mm	100lm/W
DWIP606048E	48W	4500lm	595x595x10mm	100lm/W
DWIP626248E	48W	4500lm	620x620x10mm	100lm/W
DWIP3012048E	48W	4500lm	295x1195x10mm	100lm/W


* Note:UGR<19optional .





PHOTOMETRIC DATA



DIMENSIONS

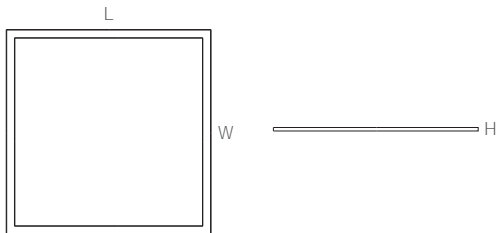

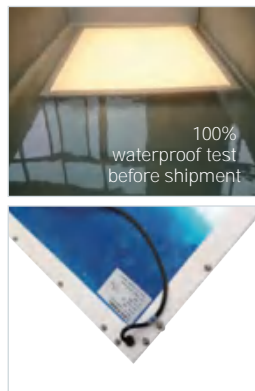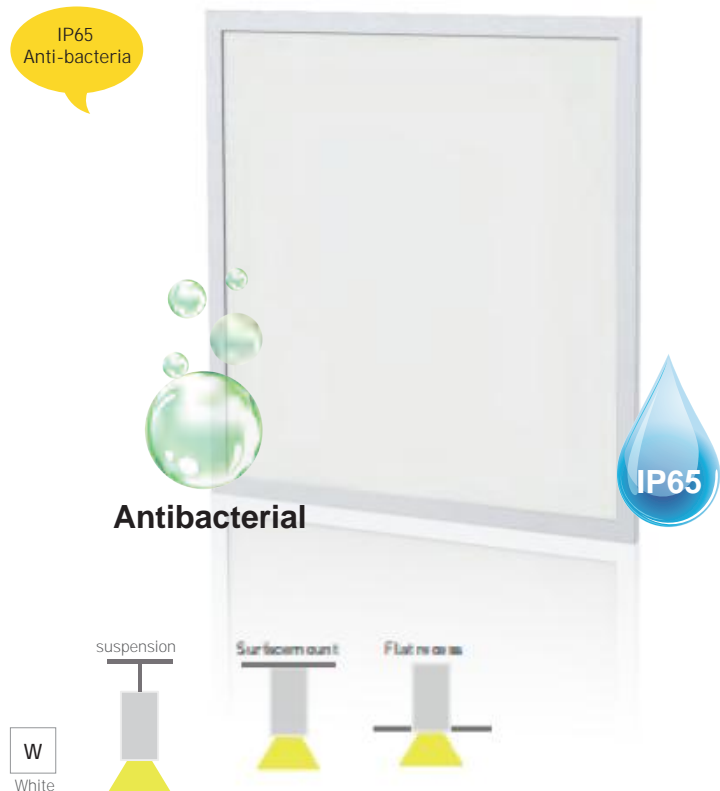

IP65 Antibacterial Panel Series

- Antibacterial function allow the panel used in the hospital, food factory and etc.;
- Dustproof and water proof;
- Antibacterial test certificates available;

* Antibacterial Test Report



INSTALLATION ACCESSORY



Suspension kits



Recessed clips




surfacemount frame




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWIPV606036	36W	3600lm	595x595x10mm	100lm/W
DWIPV626236	36W	3600lm	620x620x10mm	100lm/W
DWIPV3012036	36W	3600lm	295x1195x10mm	100lm/W
DWIPV606048	48W	4500lm	595x595x10mm	93lm/W
DWIPV626248	48W	4500lm	620x620x10mm	93lm/W
DWIPV3012048	48W	4500lm	295x1195x10mm	93lm/W

PHOTOMETRIC DATA



DIMENSIONS

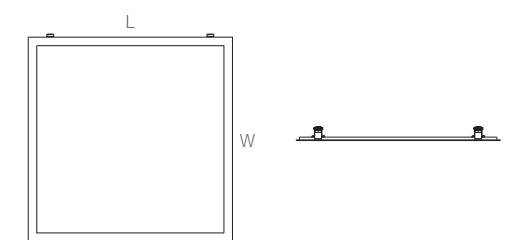




ON/OFF Sensor



Daylight harvesting Sensor

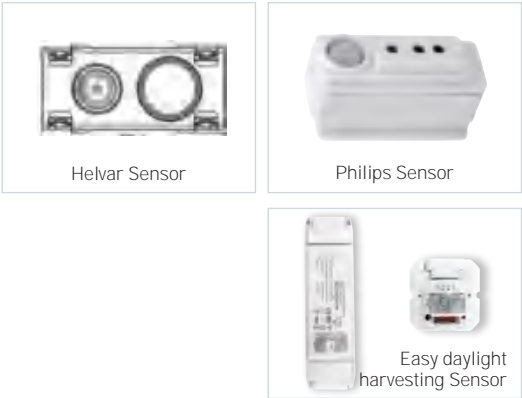

Sensor Panel Light Series

- Built-in sensor system;
- On/off sensor: Microwave sensor, PIR sensor Optional;
- Day light harvesting sensor:
Domestic Microwave sensor, **Helvar**and **PHILIPS**, PIR sensor optional;

APPLICATION

- ON/OFF Sensor: PIR sensor, microwave sensor(Accupancy sensor)


- Daylight harvesting sensor




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWS606036	36W	3600lm	595x595x10mm	ON/OFF sensor
DWS626236	36W	3600lm	620x620x10mm	
DWS3012036	36W	3600lm	295x1195x10mm	
DWS606045D	45W	4500lm	595x595x10mm	ON/OFF daylight harvest sensor
DWS626245D	45W	4500lm	620x620x10mm	
DWS3012045D	45W	4500lm	295x1195x10mm	

PHOTOMETRIC DATA



DIMENSIONS

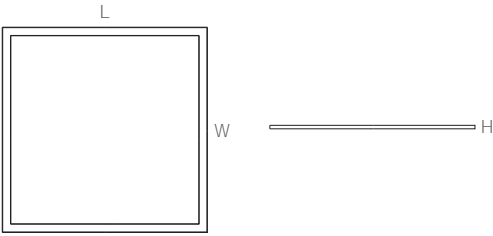

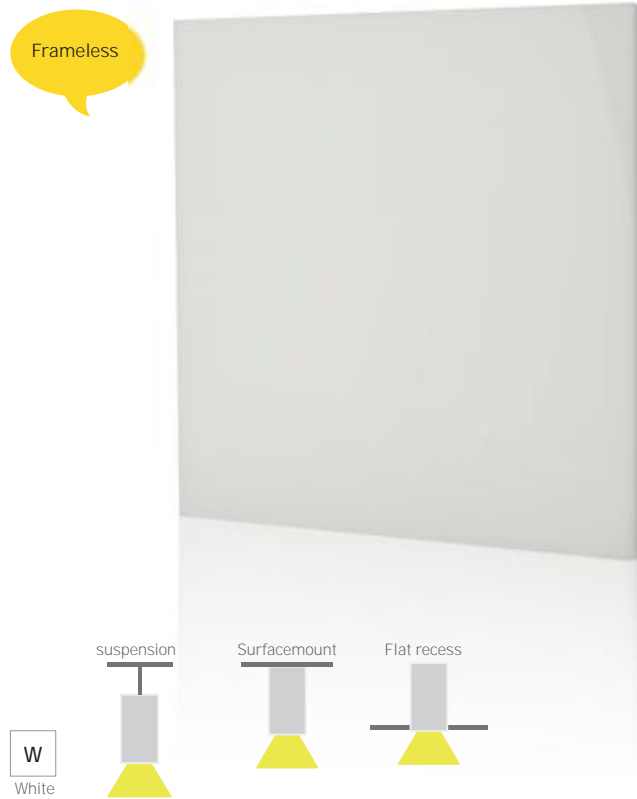

Frameless Panel Series

- Frameless panel, there is no visible frame when you light it up;
- Be able to connect one by one into different shapes;
- Diversified installation way;
- It is ideal products to build the panel ceiling and panel wall;

INSTALLATION TYPE


Mehtod A: Surface Mount



Mehtod B: Clips recess




Mehtod C: Flat recess

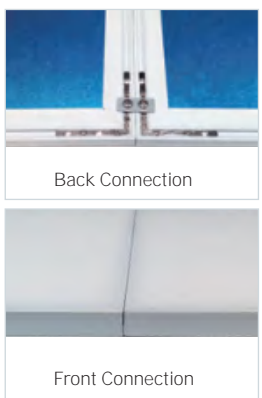


SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWM303018	18W	1440lm	5295x295x16.7mm	95lm/W
DWM606036	36W	3450lm	595x595x16.7mm	95lm/W
DWM626236	36W	3450lm	620x620x16.7mm	95lm/W
DWM3012036	36W	3450lm	295x1195x16.7mm	95lm/W

PHOTOMETRIC DATA



DIMENSIONS

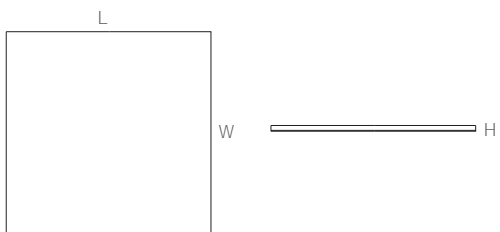

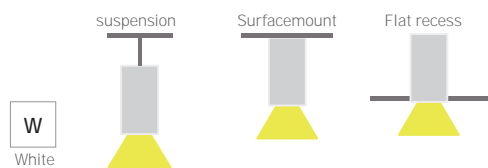

Narrow Frame Panel Series


- Only 4mm width frame, overshadow your competitor's panels by attractive and neat looking;
- Be able to connect one by one into different shapes;
- Diversified installation way;
- UGR<19 is also very good choice;
- PMMA LGP, anti yellowing;

INSTALLATION TYPE


Mehtod A: Surface Mount



Mehtod B: Clips recess




Mehtod C: Flat recess

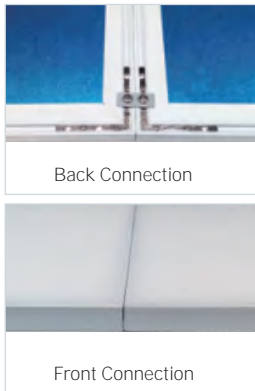



SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWN606036	36W	3600lm	595x595x14mm	Standard
DWN626236	36W	3600lm	620x620x14mm	Standard
DWN606036	36W	3600lm	295x1195x14mm	Standard
DWNUGR606036	36W	3600lm	595x595x14mm	UGR<19
DWNUGR626236	36W	3600lm	620x620x14mm	UGR<19
DWNUGR606036	36W	3600lm	295x1195x14mm	UGR<19

PHOTOMETRIC DATA




DIMENSIONS

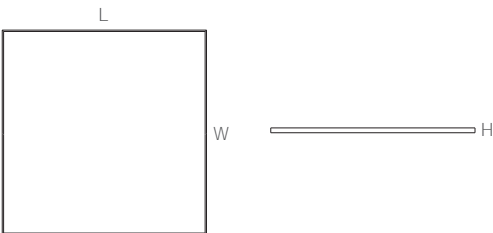



Big size



DECO Panel Series

- The size is as big as 800x800mm, 1000x1000mm, 1200x1200mm;
- Suspending installation way;
- It mainly used in the decoration purpose in the shopping mall, and exhibition hall, etc.
- CCT tunable and RGBW version is optional;

INSTALLATION ACCESSORY




Suspension kits




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWPUGR808048	48W	4800lm	800x800x12mm	100lm/W
DWPUGR10010048	48W	4800lm	1000x1000x12mm	100lm/W
DWPUGR12012048	48W	4800lm	1200x1200x12mm	100lm/W

PHOTOMETRIC DATA





DIMENSIONS

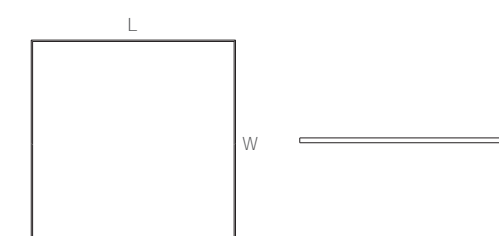







RGBW & programmable

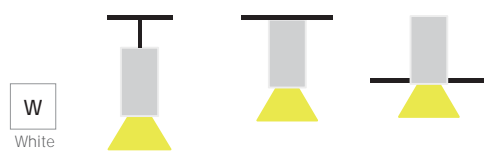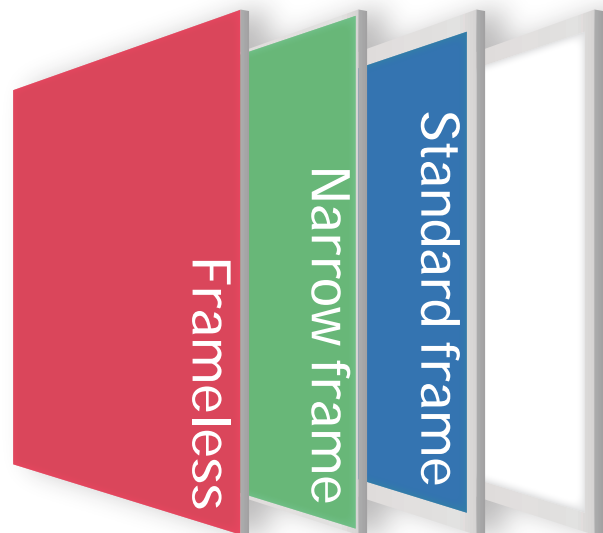

RGBW Panel Series

- DC24V/Constant Current version optional;
- Frameless,narrow frame, or standard frame;
- Controlled by DALI/2.4G RF controller/ DMX512;
- It is ideal products to build the panel ceiling and panel wall;
- Wall mount,Ceiling mounting system available;


CONTROL TYPE

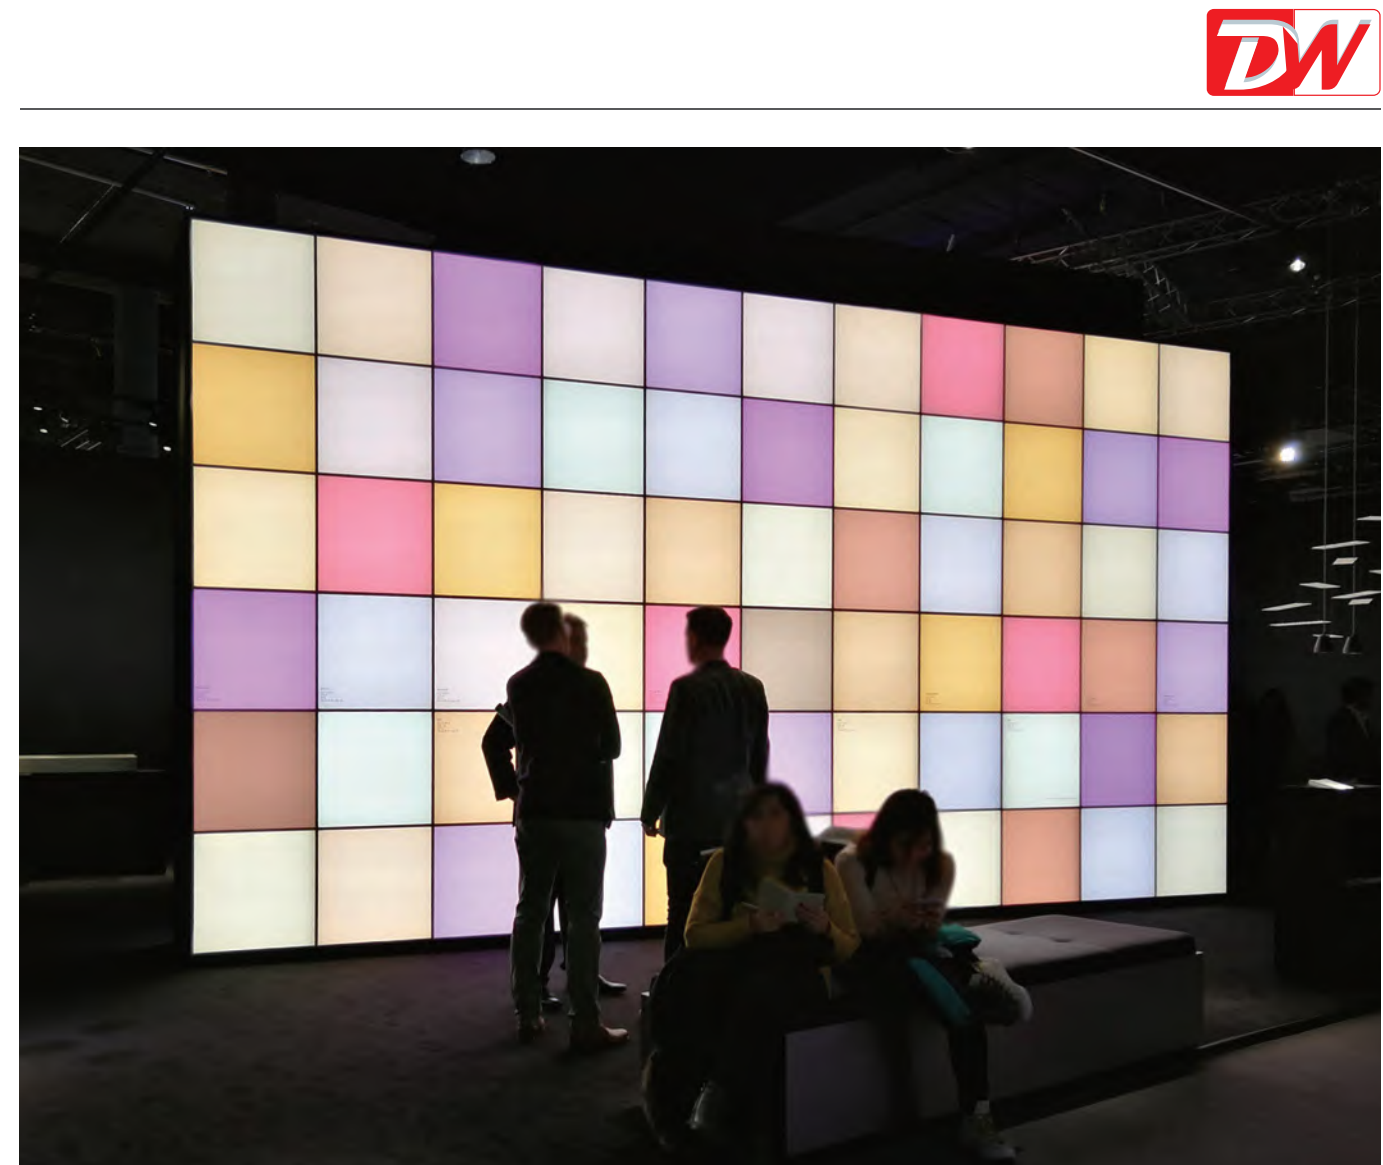


SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWM303016RGBW	16W	RGBW	295x295x21.7mm	RGBW
DWM606036RGBW	36W	RGBW	595x595x21.7mm	Frameless
DWM626236RGBW	36W	RGBW	620x620x21.7mm	Panel
DWM3012036RGBW	36W	RGBW	300x1200x21.7mm	Series
DWN303016RGBW	16W	RGBW	295x295x14mm	RGBW
DWN606036RGBW	36W	RGBW	595x595x14mm	Narrow
DWN626236RGBW	36W	RGBW	620x620x14mm	Panel
DWN3012036RGBW	36W	RGBW	300x1200x14mm	Series
DWP181808RGBW	8W	RGBW	180x180x10mm	
DWP303016RGBW	16W	RGBW	295x295x10mm	RGBW
DWP606036RGBW	36W	RGBW	595x595x10mm	Panel
DWP626236RGBW	36W	RGBW	620x620x10mm	Series
DWP3012036RGBW	36W	RGBW	300x1200x10mm	

PHOTOMETRIC DATA





DIMENSIONS

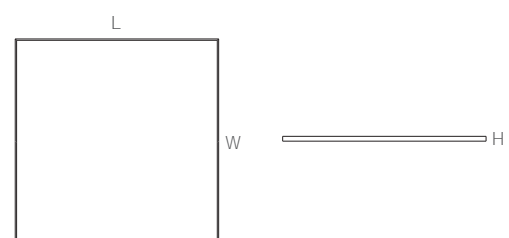



CCT
Tunable

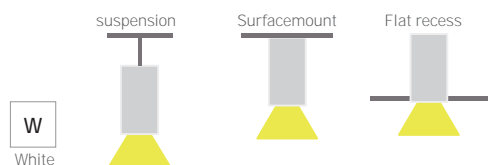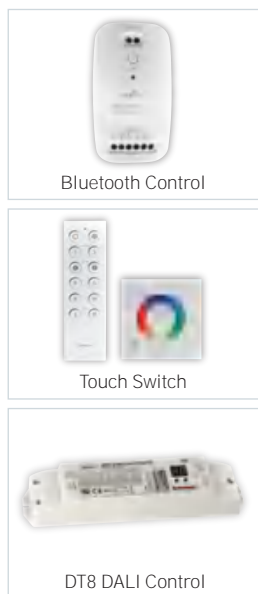

CCT Tunable Panel Series

- 2700-6500K CCT Tunable;
- UGR<19 optional;
- Controlled by DALI or RF controller;
- Pure 4mm PMMA LGP, anti yellowing
- Standard version/UGR<19 version is optional;
- There are three frame: frameless, narrow frame and standard version;

INSTALLATION ACCESSORY



Suspension kits



Recessed clips




surfacemount frame




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWM303018CCT	18W	1260lm	295x295x16.7mm	CCT
DWM606036CCT	36W	2800lm	595x595x16.7mm	Frameless
DWM626236CCT	36W	2800lm	620x620x16.7mm	Panel Series
DWM3012036CCT	36W	2800lm	295x1195x16.7mm	
DWN303018CCT	18W	1440lm	295x295x14mm	CCT
DWN606036CCT	36W	3000lm	595x595x14mm	Tunable
DWN626236CCT	36W	3000lm	620x620x14mm	Panel Series
DWN3012036CCT	36W	3000lm	295x1195x14mm	
DWP181808CCT	8W	640lm	180*180*10mm	CCT
DWP303016CCT	16W	1280lm	295*295*10mm	Tunable
DWP606036CCT	36W	3600lm	595x595x10mm	Narrow Panel Series
DWP626236CCT	36W	3600lm	620x620x10mm	
DWP3012036CCT	36W	3600lm	295x1195x10mm	

PHOTOMETRIC DATA



DIMENSIONS

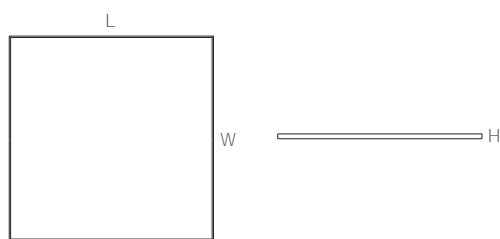

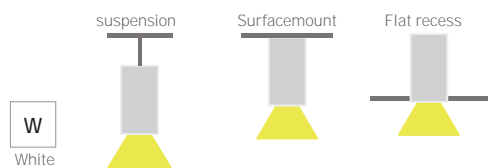

Linear Narrow Frame Panel Series


- Only 4mm width frame;
- Linear Linkable features enable users to expand the space easily and install these panels as long as they want;
- Pure PMMA LGP, resistant color becoming yellowing;
- Be able to connect one by one into different shapes;
- Diversified installation way;
- UGR<19 is also very good choice;

INSTALLATION TYPE


Mehtod A: Surface Mount



Mehtod B: Clips recess




Mehtod C: Flat recess

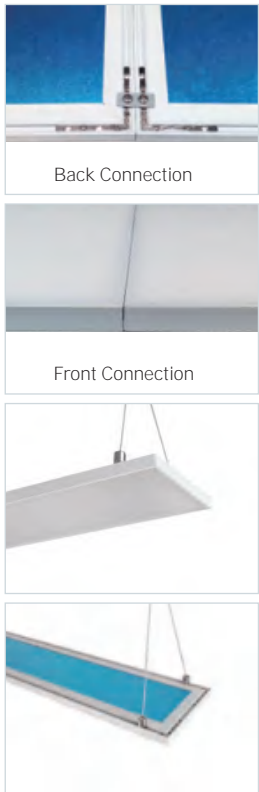



SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWN1010024	24W	1440lm	100x1000x14mm	100lm/W
DWN2012036	36W	3600lm	195x1195x14mm	100lm/W
DWN3012036	36W	3600lm	295x1195x14mm	100lm/W
DWN3012048	48W	4800lm	295x1195x14mm	100lm/W

PHOTOMETRIC DATA






DIMENSIONS





Real
frameless
panel coming

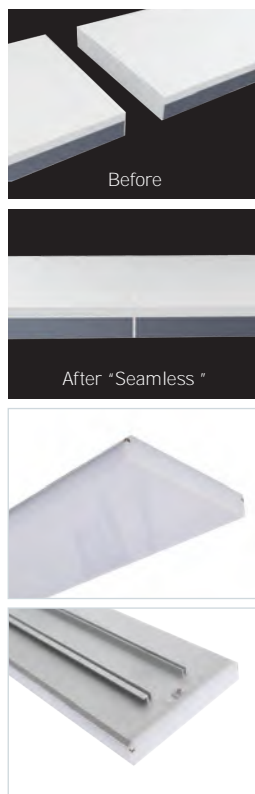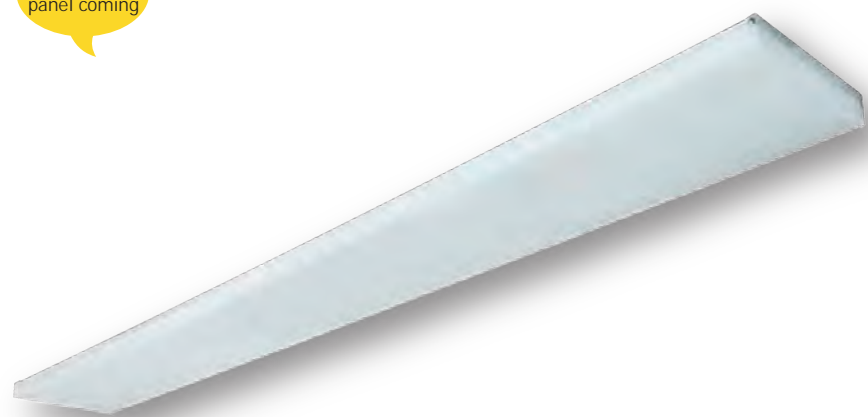


3D Linear Frameless Panel Series


- This is real frameless panel!!!
- Linear Linkable features enable users to expand the space easily and install these panels as long as they want;
- Pure PMMA LGP, resistant color becoming yellowing;
- High efficiency:lumen output 100lm/W;
- Soft and smooth light distribution;
- Diversified installation way: Suspending, clips recessed, flat recessed, surface mount,Tunner track installation

INSTALLATION TYPE


Mehtod A: Suspending



Mehtod B: Clips recessed




Mehtod C: Flat recessed




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWF146036	36W	2800lm	145x595x30mm	100lm/W
DWF1412036	36W	3600lm	145x1195x30mm	100lm/W
DWF1412048	48W	4800lm	145x1195x30mm	100lm/W

PHOTOMETRIC DATA





DIMENSIONS

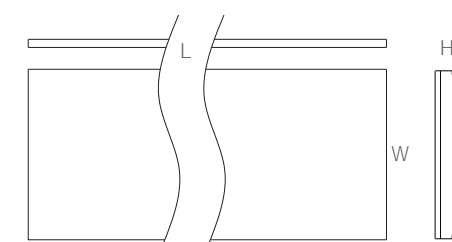



Pendant light
UGR<19

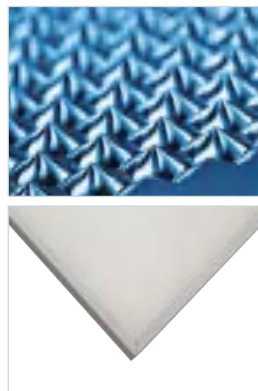


UGR<19 Pendant Light Series

- Simple design, special used in the office and library;
- Soft light output, UGR<19;
- Driver built in the ceiling box;
- PMMA LGP, anti yellowing;

INSTALLATION ACCESSORY




Suspension kits

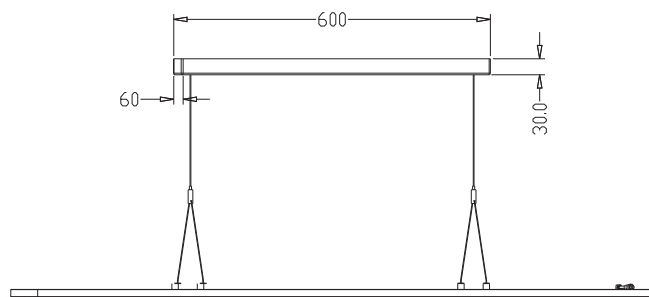


SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWNUGR1412036PT	36W	2800lm	145x1195x14mm	100lm/w	<19
DWNUGR2012036PT	36W	3240lm	195x1195x14mm	100lm/w	<19

PHOTOMETRIC DATA





DIMENSIONS

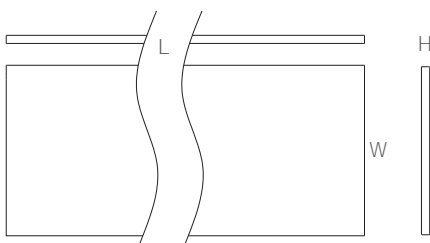



Frame
pendant light

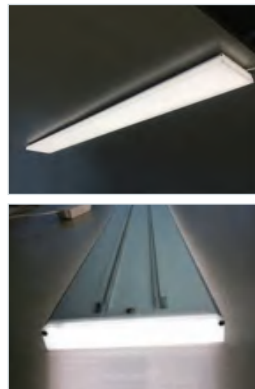



3D Frameless Pendant Light Series

- 3D frameless pendant light;
- Simple design, special used in the office and library;
- Driver built in the ceiling box;
- Efficiency is 100lm/W;

INSTALLATION ACCESSORY




Suspension kits

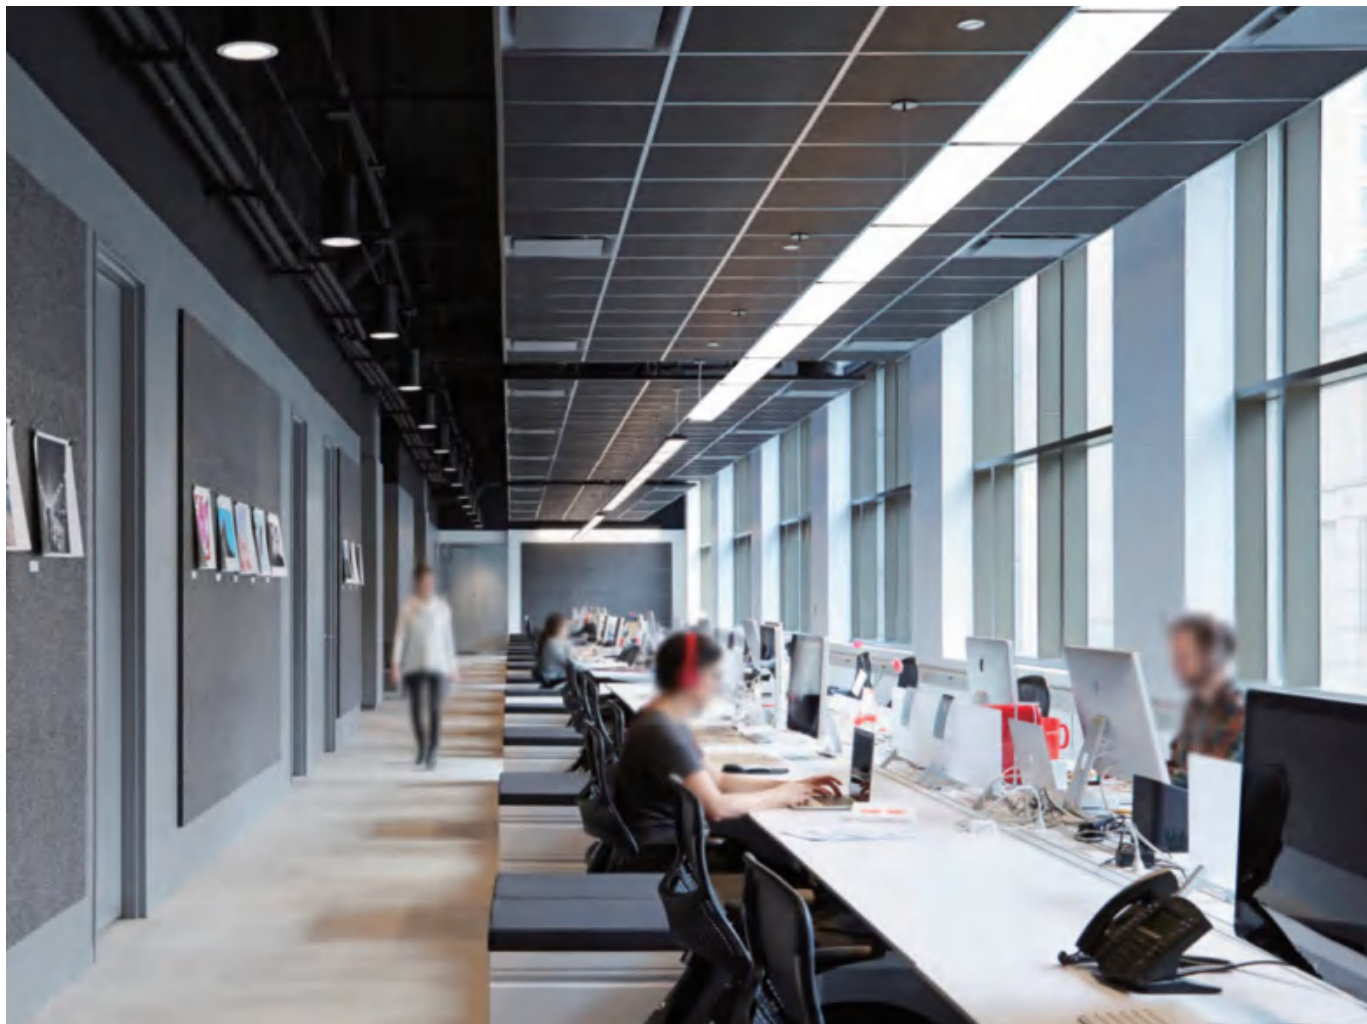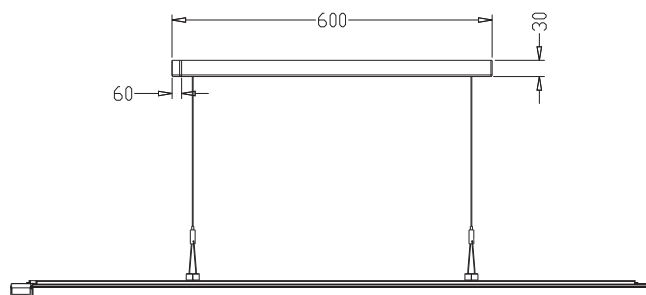


SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWF1412036PT	36W	3600lm	145x1195x14mm	100lm/w	<19

PHOTOMETRIC DATA



DIMENSIONS

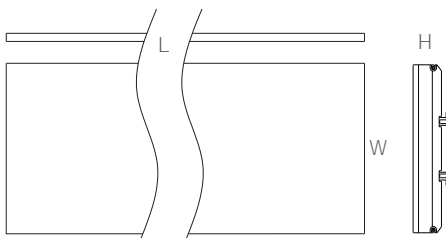



Trunk
140lm/W;
160lm/W



Pro Trunk Lens Version (New Installation)

- Easy and quick continuous installation without any tools by the clips integrated inside;
- 140LM/W and 160LM/W high efficiency;
- Free selection beam angle from Sharp 30°60°90° to flood 120°and from asymmetric 25°to double asymmetric 25°;
- 1-10V dimming, Dali control optional;
- X,L,T shape Node connector available;
- White coated aluminum housing and silver color optional;
- Different length of module and rail is available;
- Sensor functional optional;

INSTALLATION ACCESSORY



End cap



Suspending / Surface mount Kit



Bland Cover




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWT535X	35W	4900lm	1436x70x72mm	140lm/W
DWT560X	55W	7700lm	1436x70x72mm	140lm/W
DWT570X	70W	9800lm	1436x70x72mm	140lm/W
DWT535XB	35W	5600lm	1436x70x72mm	160lm/W
DWT560XB	55W	8800lm	1436x70x72mm	160lm/W
DWT570XB	70W	11200lm	1436x70x72mm	160lm/W

*X=3/5/7, it means 3 wires, 5wires, 7 wires, 9 wires

PHOTOMETRIC DATA



DIMENSIONS

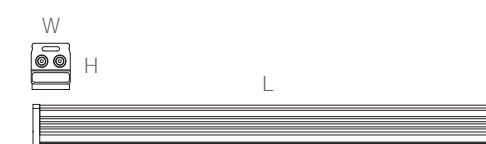


*Customized Length





Trunk
Frosted cover


120°



Pro Trunk Frosted Cover (New Installation)

- Easy and quick continous installation without any tools by the clips integrated inside;
- 120lm/W , 145lm/W;
- Frosted LED module cover;
- 1-10V dimming, Dali control optional;
- X,L,T shape Node connector available;
- White coated aluminum housing and silver color optional;
- Different length of module and rail is available;
- Sensor functional optional;

INSTALLATION ACCESSORY

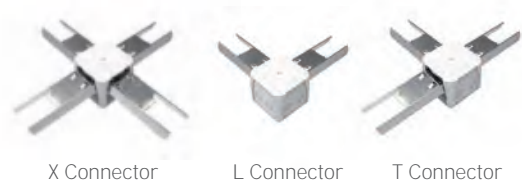

End cap



Suspending / Surface mount Kit



Bland Cover




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWTF535X	35W	4200lm	1436x70x76mm	120lm/W
DWTF560X	55W	6600lm	1436x70x76mm	120lm/W
DWTF570X	70W	8400lm	1436x70x76mm	120lm/W
DWTF535XB	35W	5100lm	1436x70x76mm	145lm/W
DWTF560XB	55W	8000lm	1436x70x76mm	145lm/W
DWTF570XB	70W	10000lm	1436x70x76mm	145lm/W

*X=3/5/7, it means 3 wires, 5wires, 7 wires, 9 wires

PHOTOMETRIC DATA



DIMENSIONS

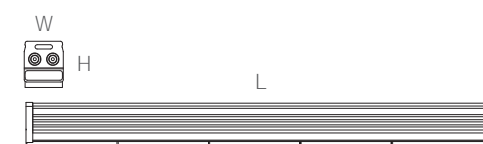

*Customized Length





Retrofit Trunk Lens Version

- It is ideal retrofit for the existing T-8 or T5 without any changes of the wiring inside and any tools by the clips integrated inside;
- 140lm/W ; 160lm/W; free selection beam angle from Sharp 30°60°90° to flood 120°and from asymmetric 25°to double asymmetric 25°;
- 1-10V dimming, Dali control optional;
- X,L,T shape Node connector available;
- White coated aluminum housing and silver color optional;
- It could be used in shops, supermarket, office ect;
- Sensor functional optional;
- Compatible with famouse brand:



SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWT535RX	35W	4900lm	1436x70x33mm	140lm/W
DWT560RX	55W	7700lm	1436x70x33mm	140lm/W
DWT570RX	70W	9800lm	1436x70x33mm	140lm/W
DWT535RXB	35W	5600lm	1436x70x33mm	160lm/W
DWT560RXB	55W	8800lm	1436x70x33mm	160lm/W
DWT570RXB	70W	11200lm	1436x70x33mm	160lm/W

*X=3/5/7,it means 3 wires, 5wires, 7 wires, 9 wires



Retrofit trunk installation manual

***Warning: Make sure the power is off before installation.**

Step 1


Step 2

Step 3

Step 4


Step 5

Step 6

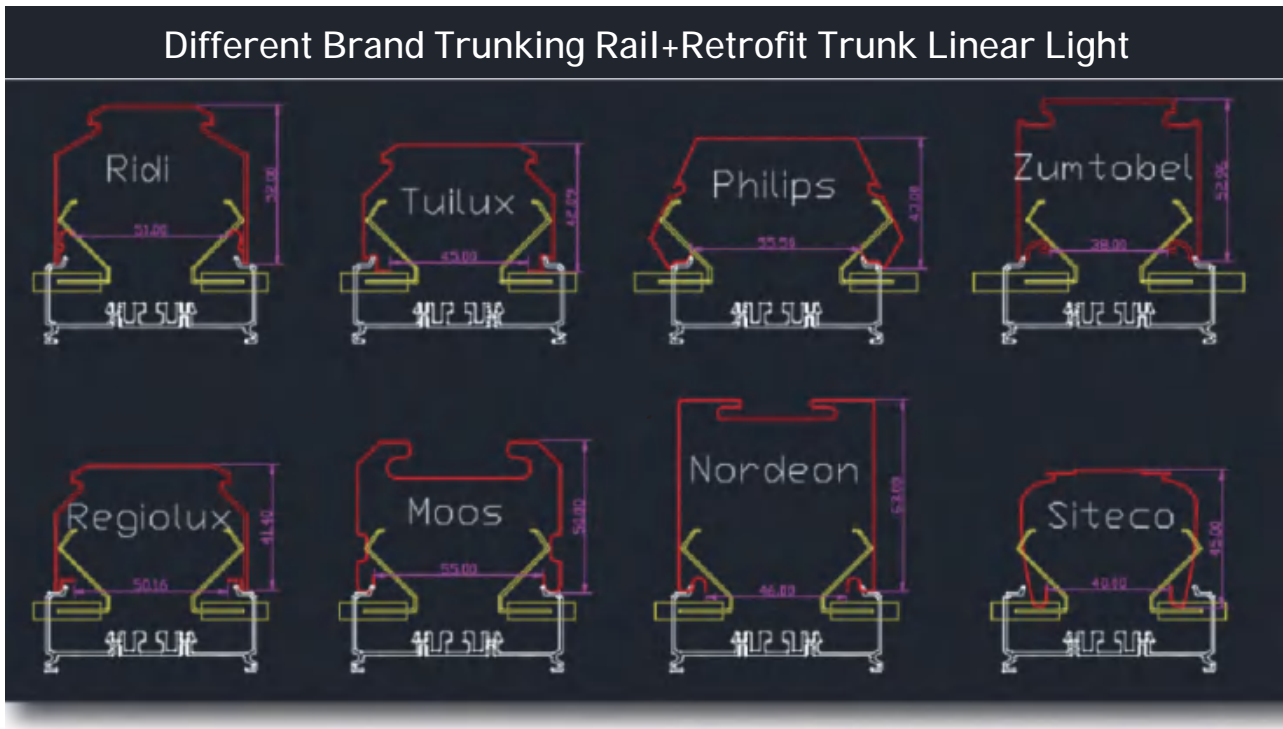



Retrofit
120lm/W



Retrofit Trunk Frosted Cover

- It is ideal retrofit for the existing T-8 or T5 without any changes of the wiring inside and any tools by the clips integrated inside;
- 120lm/W, 145lm/W, frosted LED module cover;
- 1-10V dimming, Dali control optional;
- X,L,T shape Node connector available;
- White coated aluminum housing and silver color optional
- It could be used in shops, supermarket, office and ect;
- Sensor functional optional;
- Compatible with famouse brand:



SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWTF535RX	35W	4200lm	1436x70x37mm	120lm/W
DWTF560RX	55W	6600lm	1436x70x37mm	120lm/W
DWTF570RX	70W	8400lm	1436x70x37mm	120lm/W
DWTF535RXB	35W	5100lm	1436x70x37mm	145lm/W
DWTF560RXB	55W	8000lm	1436x70x37mm	145lm/W
DWTF570RXB	70W	10000lm	1436x70x37mm	145lm/W


*X=3/5/7, it means 3 wires, 5wires, 7 wires, 9 wires



INSTALLATION ACCESSORY





PHOTOMETRIC DATA

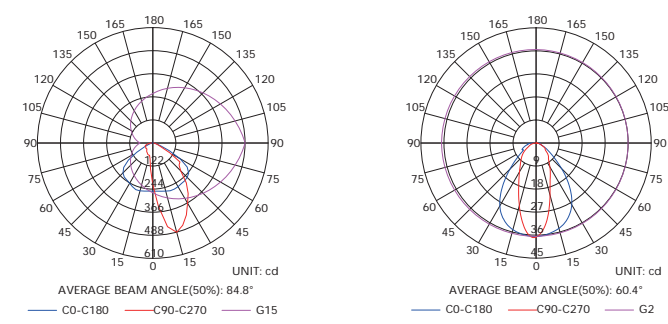

DIMENSIONS



*Customized Length

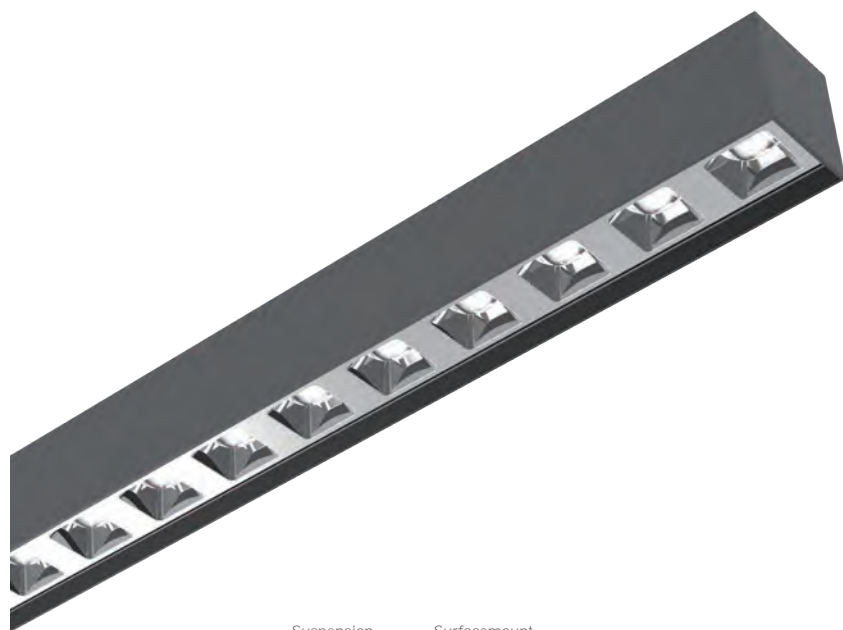

L55 Suspension reflector Series

- Classic flavor grille design;
- High efficiency up to 120lm/W;
- Lower glare UGR<19;
- Simply extrusion profile with screw free diecasting end cap;
- Integrated driver, RA90 optional;
- Flexible installation: Suspended, flat recessed, surfacemount ;
- Simple continuous connection;
- X, T, L connector help to organise the linear light into different shapes;
- Lifud,BOKE, Tridonic diver or other driver optional;

CONNECTORS ACCESSORY



INSTALLATION ACCESSORY




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLR436	36W	4320lm	W55xH58xL1124mm	120lm/W	<19
DWLR545	45W	5400lm	W55xH58xL1404mm	120lm/W	<19
DWLR436B	36W	3600lm	W55xH58xL1124mm	100lm/W	<19
DWLR545B	45W	4500lm	W55xH58xL1404mm	100lm/W	<19
DWLR436P	36W	3600lm	W55xH58xL1124mm	100lm/W	<22
DWLR545P	45W	4500lm	W55xH58xL1404mm	100lm/W	<22
DWLR436U	36W	3600lm	W55xH58xL1124mm	100lm/W	<19
DWLR545U	45W	4500lm	W55xH58xL1404mm	100lm/W	<19



Note: All models in this series can be up/ down version, up is 10W,1000lm.

PHOTOMETRIC DATA



DIMENSIONS

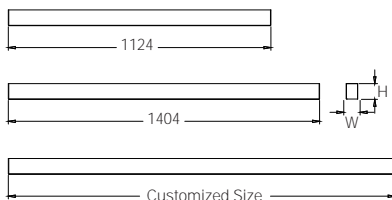

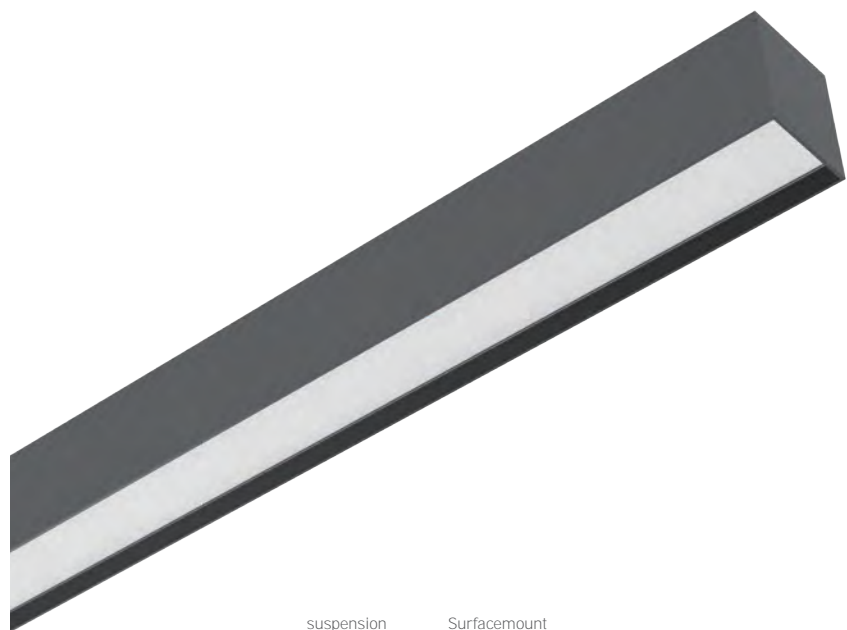

Opal linear



UGR linear



Flexible PC Cover



Up/Down Opal Linear

L55 Suspension Opal Series

- Opal diffuser and prismatic UGR<19 version optional;
- Efficiency: 100lm/W;
- Anti-glare design UGR<19 optional
- Simply extrusion profile with screw free diecasting end cap;
- Integrated driver, RA90 optional;
- Flexible installation: Suspended, surfacemount ;
- Standalone type and continuous row optional;
- Lifud,BOKE, Tridonic diver or other driver optional

CONNECTORS ACCESSORY



180° Joining Connector

INSTALLATION ACCESSORY



Suspension kits



Surfacemount kits




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWLO436	36W	3600lm	W55xH58xL1124mm	100lm/W
DWLO545	45W	4500lm	W55xH58xL1404mm	100lm/W
DWLU436	36W	3600lm	W55xH58xL1124mm	100lm/w
DWLU545	45W	4500lm	W55xH58xL1404mm	100lm/w
DWLF436	36W	3600lm	W55xH58xL1124mm	100lm/W
DWLF545	45W	4500lm	W55xH58xL1404mm	100lm/W

Note: All models in this series can be up/ down version, up is 10W,1000lm.

PHOTOMETRIC DATA






DIMENSIONS

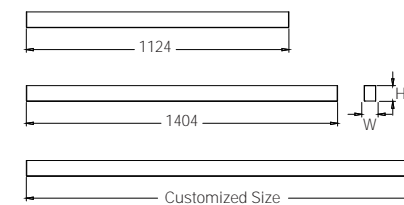




Reflector
120lm/W
UGR<19

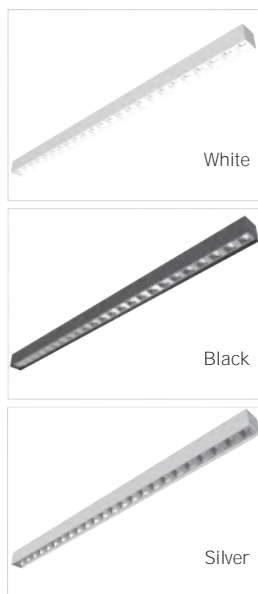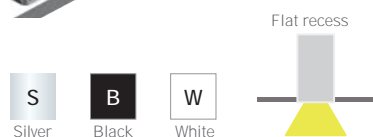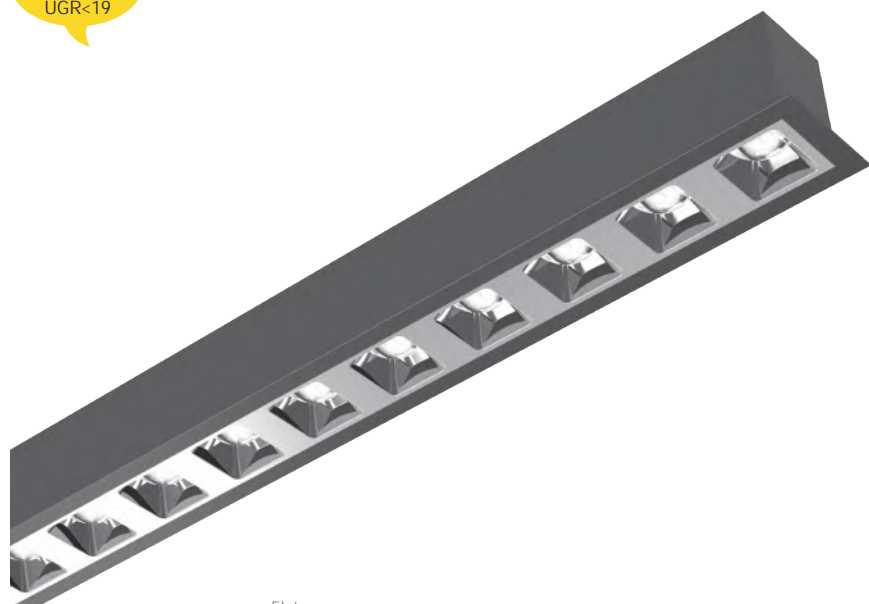

L55 Recessed Reflector Series

- Louvres for efficient visual comfort;
- High efficiency up to 120lm/W;
- Optimal glare control, UGR<19;
- Integrated driver, RA90 optional;
- Flat recessed design;
- 180° Joining connector helps continuous connection;
- Lifud,BOKE, Tridonic diver or other driver optional

CONNECTORS ACCESSORY

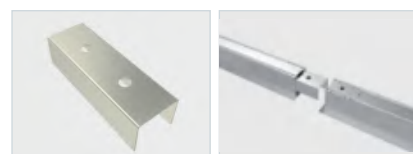

Recessed 180° Joining Connector

INSTALLATION ACCESSORY




Recessed clips




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLR436R	36W	4320lm	W59xH57xL1142mm	120lm/W	<19
DWLR545R	45W	5400lm	W59xH57xL1422mm	120lm/W	<19

PHOTOMETRIC DATA



DIMENSIONS

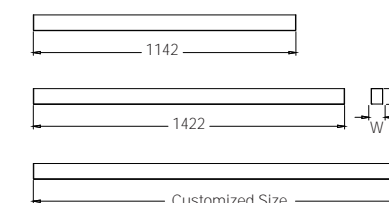

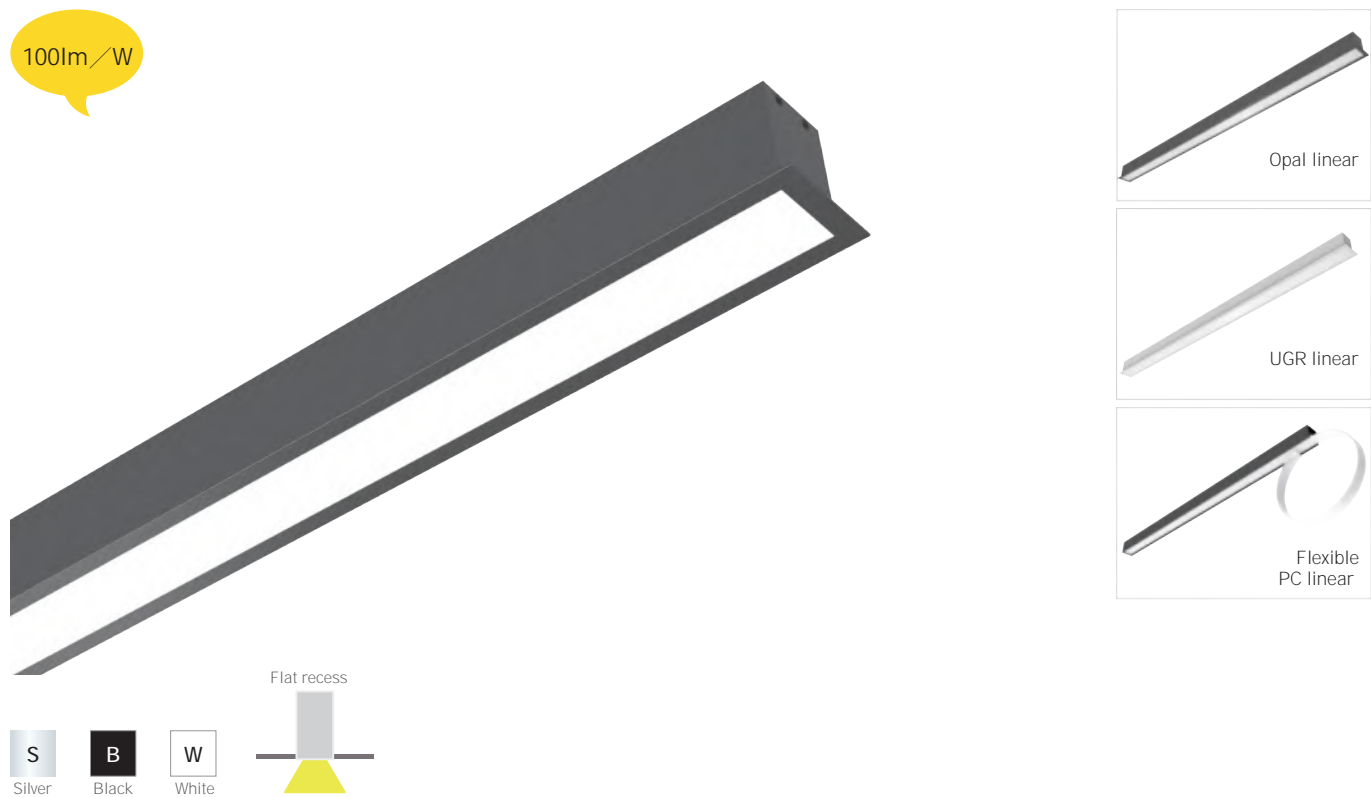


L55 Recessed Opal Series

- Opal diffuser and prismatic UGR<19 version optional;
- Efficiency 80lm/W;
- Lower glare UGR<19 optional
- Integrated driver, RA90 optional;
- Recessed installation;
- 180° Joining connector helps continuous connection;
- Lifud,BOKE, Tridonic diver or other driver optionalction to expand these linear light long;
- Seamless connection and no light leakage;

CONNECTORS ACCESSORY




INSTALLATION ACCESSORY




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWLO436R	36W	3600lm	W59xH57xL1142mm	100lm/W
DWLO545R	45W	4500lm	W59xH57xL1422mm	100lm/W
DWLF436R	36W	3600lm	W59xH57xL1142mm	100lm/W
DWLF545R	45W	4500lm	W59xH57xL1422mm	100lm/W

PHOTOMETRIC DATA



DIMENSIONS

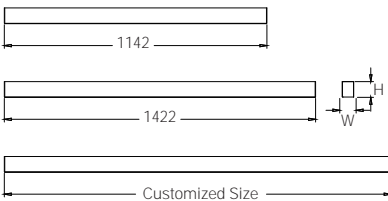

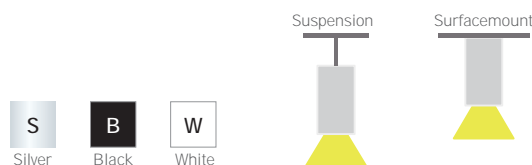

L50 Daisy Linear Series

- Fashionable LEDiL daisy linear LENS used;
- Up to 120lm/W, UGR<19;
- Easy connection without light leaking;
- UP/Down light;
- Integrated driver, RA90 optional;

CONNECTORS ACCESSORY




INSTALLATION ACCESSORY




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLEP430	30W	3600lm	W55xH58xL1124	120lm/W	<19
DWLP536	36W	4320lm	W55xH58xL1404	120lm/W	<19
DWLP430U	30W Down/ 10W Up	1400lm	W55xH58xL1124	120lm/W	<19
DWLP536U	36W Down/ 10W Up	4320lm/1000lm	W55xH58xL1404	120lm/W	<19

PHOTOMETRIC DATA



DIMENSIONS

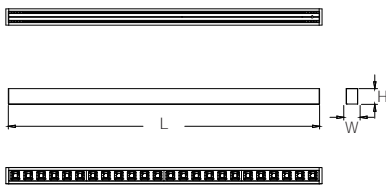

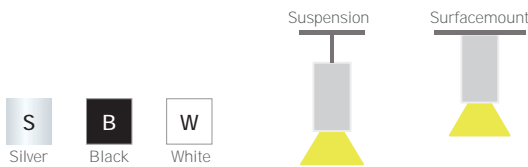

L40 LENS Linear Series

- Fashionable LENS used, 24°C and 38°C are optional; 70°C 90°C Len optional
- Up to 115lm/W, UGR<16;
- Easy connection without light leaking;
- UP/Down light;
- Integrated driver, RA90 optional;

CONNECTORS ACCESSORY




INSTALLATION ACCESSORY




SPEC.



Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLE430	30W	3450lm	W40xH60xL1140	115lm/W	<16
DWLE536	36W	4140lm	W40xH60xL1520	115lm/W	<16
DWLE430U	30W Down/ 10W Up	3450lm/1000lm	W40xH60xL1140	115lm/W	<16
DWLE536U	36W Down/ 10W Up	4140lm/1000lm	W40xH60xL1520	115lm/W	<16

PHOTOMETRIC DATA



DIMENSIONS

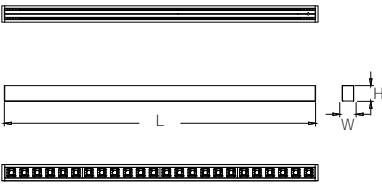

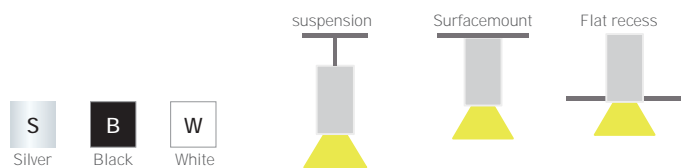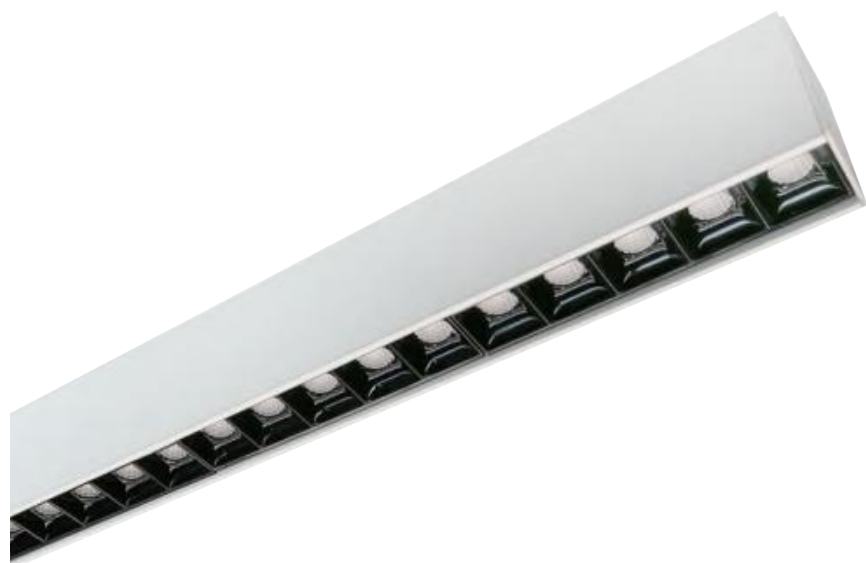

L30 LENS Linear Series

- Compact reflector and housing, 30°C,45°C and 90°C are optional;
- UGR<19;
- Easy connection without light leaking;
- Suspended, recessed, surface mount of all kinds flexible installation;
- Integrated driver, RA90 optional;

CONNECTORS ACCESSORY




INSTALLATION ACCESSORY




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLE3430	36W	3200lm	W34xH62.5xL1220	100lm/W	<19
DWLE3536	45W	4050lm	W34xH62.5xL1484	100lm/W	<19
DWLE3430U	36W	3200lm/1000lm	W46xH38.8xL1195	100lm/W	<19
DWLE3536U	45W	4050lm/1000lm	W46xH38.8xL1469	100lm/W	<19

PHOTOMETRIC DATA



DIMENSIONS

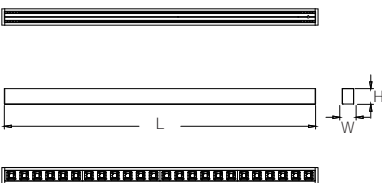

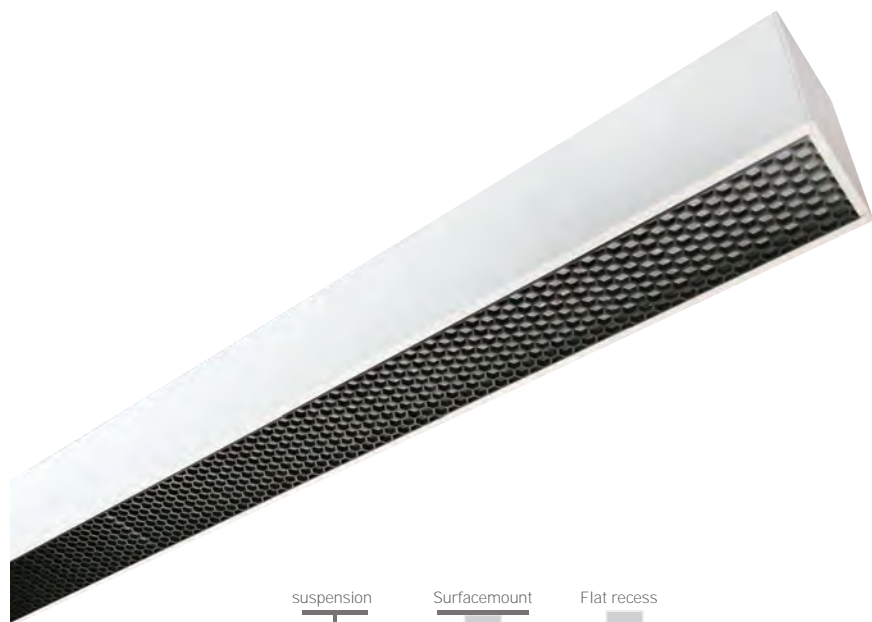

L50 Net Linear Series

- Fashionable Net used, 30°C, 60°C and 90°C are optional;
- UGR<19;
- Easy connection without light leaking;
- UP/Down light;
- Integrated driver, RA90 optional;

CONNECTORS ACCESSORY



L Connector



T Connector



X Connector



180° Joining Connector

INSTALLATION ACCESSORY



Suspension kits




Surfacemount kits




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLN436	36W	3200lm	W52xH68xL1180	90lm/W	<19
DWLN548	45W	4050lm	W52xH68xL1460	90lm/W	<19
DWLN436U	36W Down/ 10W Up	3200lm/1000lm	W52xH68xL1180	90lm/W	<19
DWLN548U	45W Down/ 10W Up	4050lm/1000lm	W52xH68xL1460	90lm/W	<19

PHOTOMETRIC DATA



DIMENSIONS

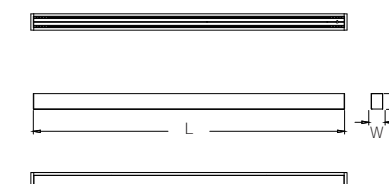



L50 Wallwash Light Series

- Designed to be used in as the wall washer to highlight the picture, commodity, letters on the wall in the shops, stores, school, ect.
- RA90 and dimmable optional;
- Simply extrusion profile with screw free diecasting end cap;
- Integrated drvier, RA90 and CCT tunable optional;



CONNECTORS ACCESSORY



180° Joining
Connector

INSTALLATION ACCESSORY




Suspension kits




SPEC.


Model No.	Wattage	Luminous flux	Dimension	Efficiency	UGR
DWLA4-24V	24W	1440lm	W50xH80xL1140mm	60lm/W	<22
DWLA5-24V	48W	2880lm	W50xH80xL1450mm	60lm/W	<22

PHOTOMETRIC DATA



DIMENSIONS

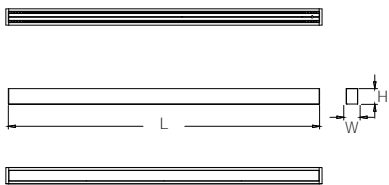

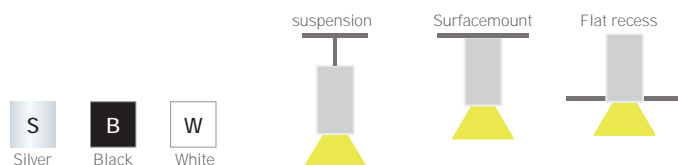

L50 Circle Linear Series

- Fashionable Circle suspended light ;
- Different size is optional from 400, 600, 800 to 1000, 1200, 1600;
- Black, white, silver color optional;
- Integrated driver, RA90 optional;

CONNECTORS ACCESSORY

INSTALLATION ACCESSORY




Suspension kits




SPEC.

Model No.	Wattage	Luminous flux	Dimension	Efficiency
DWC420	20W	1600lm	400x75mm	80lm/W
DWC636	36W	3200lm	600x75mm	80lm/W
DWC848	48W	3840lm	800x75mm	80lm/W
DWC1048	48W	3840lm	1000x75mm	80lm/W
DWC1260	60W	4800lm	1200x75mm	80lm/W
DWC1660	60W	4800lm	1600x75mm	80lm/W

PHOTOMETRIC DATA




DIMENSIONS

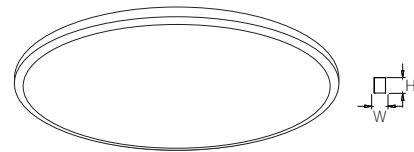


Installation Instructions


Method A: Suspending




1. Tighten the set screws to fix 4 strip corners at both ends



2. 1. Fix the lifting brackets and cable holders at both ends with screws.

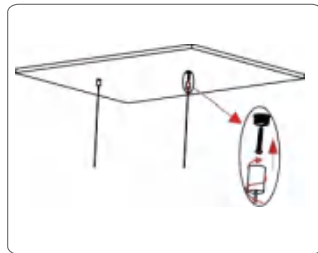


3. Fix the bases on the ceiling according to the drawing and install the cables into the bases.

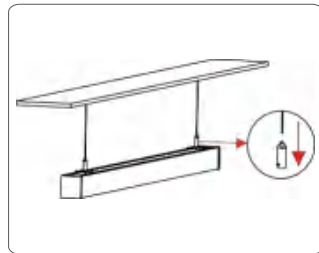


4. String one end of the sling into the cable holder.

Method B: Ceiling installation

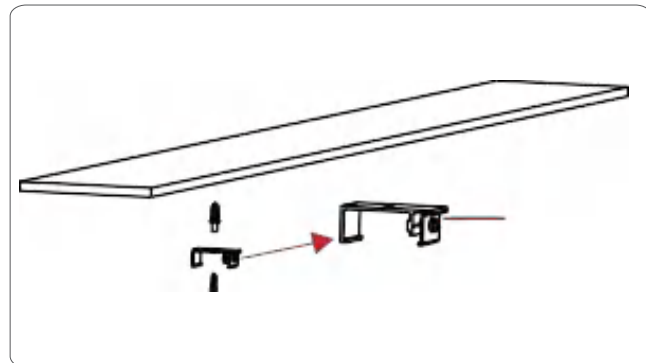


1. The two ceiling brackets are screwed to the ceiling, and the 2 brackets are installed within lamp length.

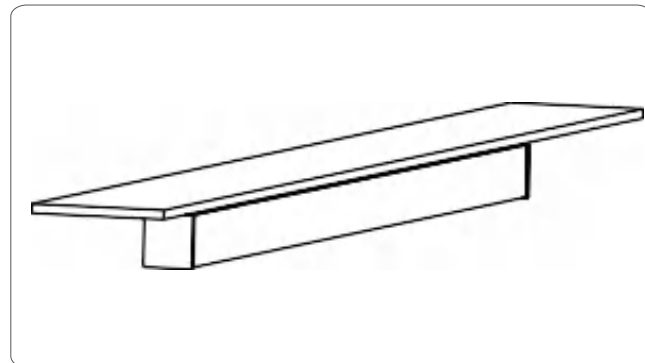


2. Install the lamp into the ceiling brackets and lock the screws on the ceiling brackets.

Method C: Connected with end caps

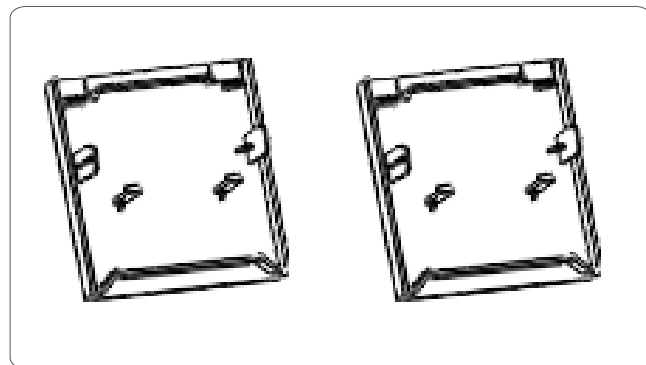


1. Remove the two small pieces at the top of the end cap.

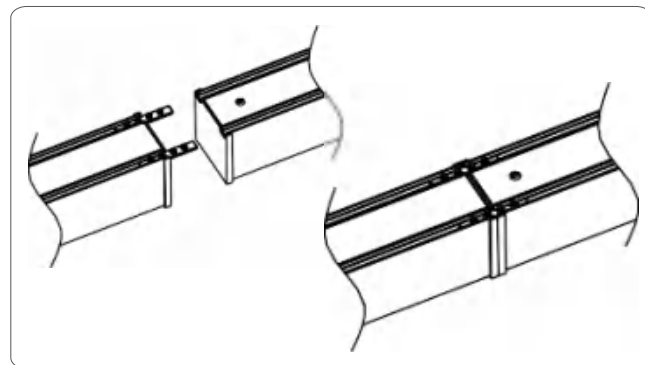


2. Use the set screw to fix the bar connectors to one end of the product, then insert another product to be spliced into the bar connectors and lock the machine screw.

Method D: Connected without end caps



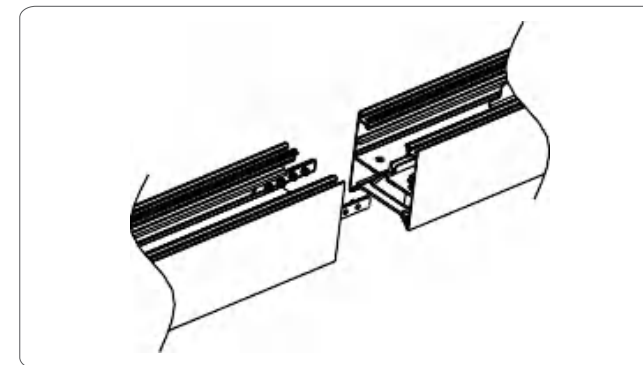


1. Remove the back cover and end cover, and fix the bar connectors on the side of the product with set screws.

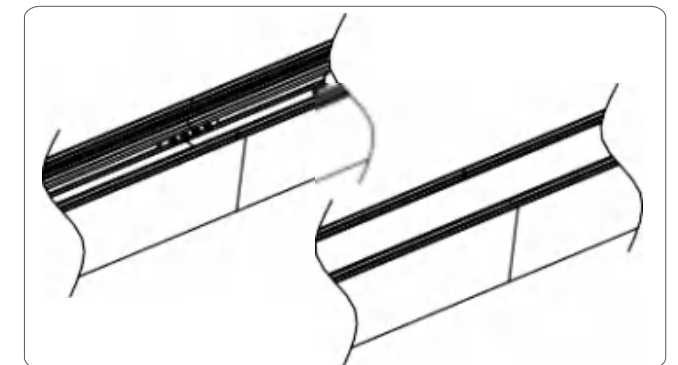


2. Insert another product to the bar connector and lock the machine screws. Install the back cover.


Method E: LTX Connectors

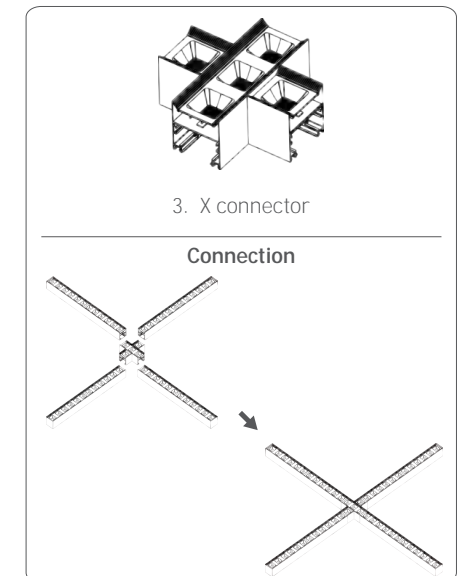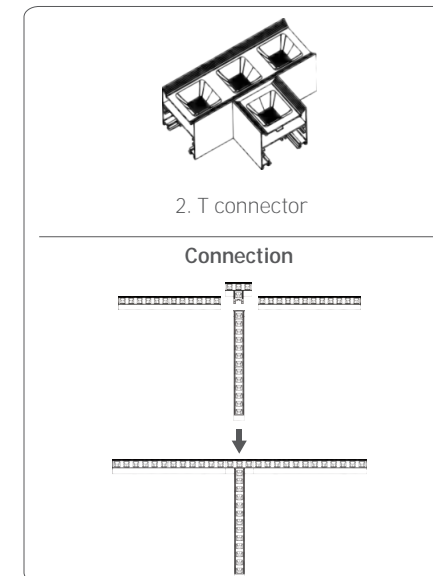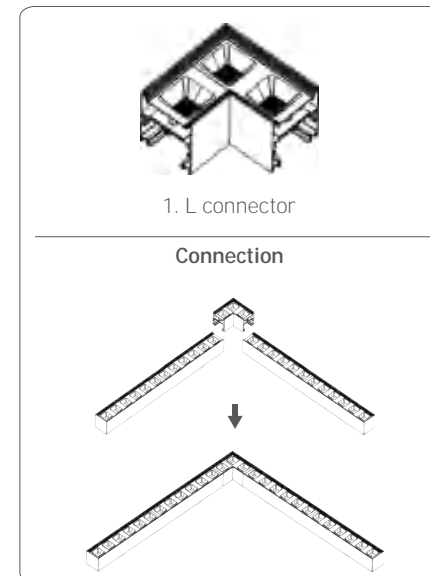

Method F: Recessed installation

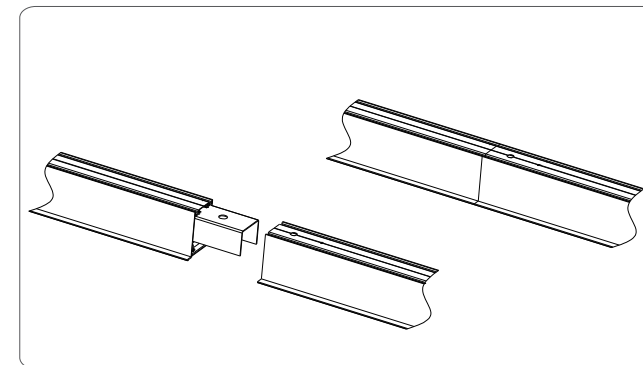


1. Use the recessed 180° connector to connect 2 pieces of linear light together.

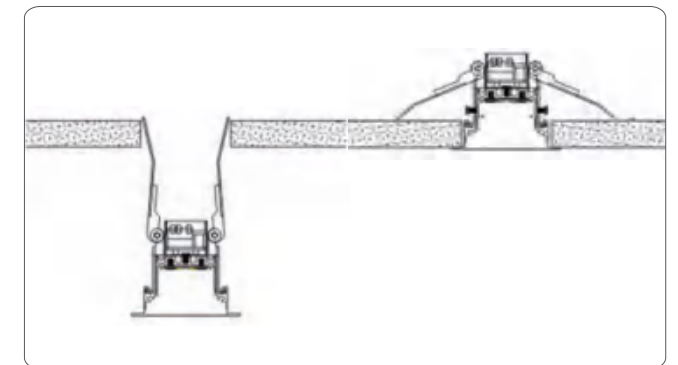

2. Fix the 4 pieces of recessed clips on the linear light and pass the linear light to the hole and release the clips.

1.PMMA LGP & PS/MS Differences

Most of the time, all the standard panel like the same, but with very different price. Therefore Dolight explains some key components to you for better understanding on the quality and price.

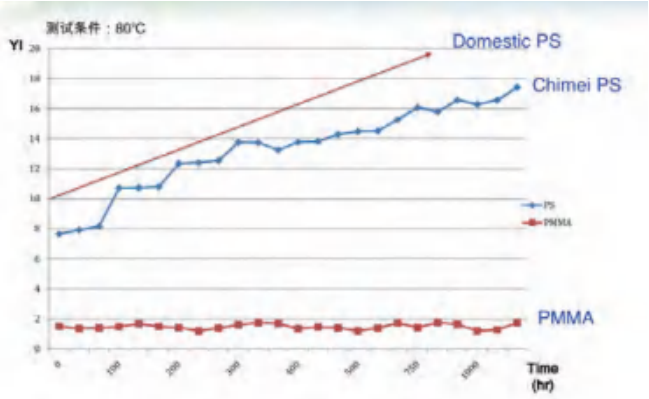


PMMA will anti yellowing; if LGP is PS the MS, the LGP Will go yellowing after used in 6month step by step.

PS/MS LGP	PMMA LGP
PS/MS LGP is more cheaper, but the LGP will going yellowing.	PMMA is more expensive. This material will be very good to anti yellowing;

2.LED USED


Dolight will choose one or two adjoining binning LED to keep the panel consistency. Each batch panel SDCM <5 and in the same color.

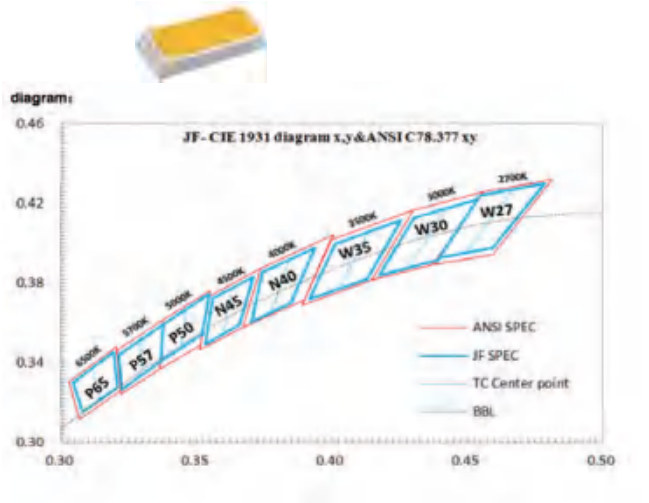

3.Flickering driver and Flicker free driver.

Flickering	Non flickering
Flickering driver used; It will cause the heachach or eye tiredness	Non flickering driver used; The light is more comfortable

4. More and more market requires the UGR<19 panel to avoid the lighting glare. The following picture shows you clearly how UGR<19 panel protect your eye.

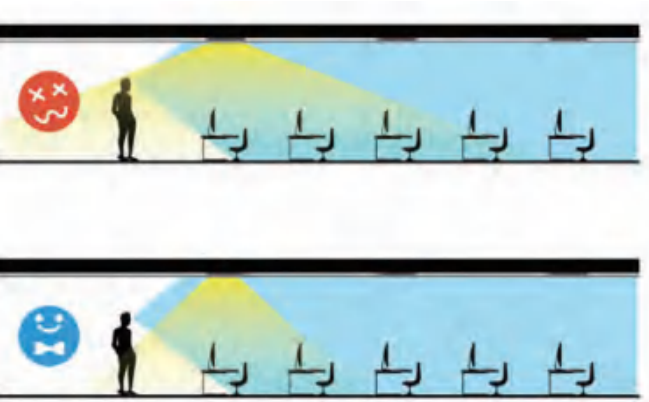


UGR>19 Panel: light is bright harsh. The light will hurt your eye;

UGR<19 Panel: soft light, protect your eye.


Just Do Light, Just Dolight

Narrow Frame And Frameless Panel Application

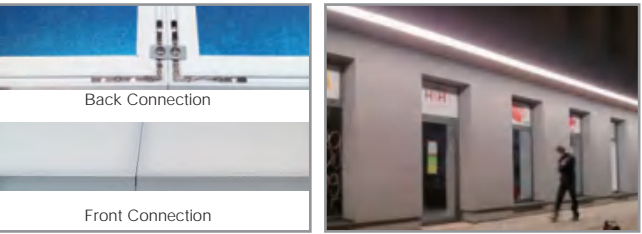

Linkable to be linear or to ceiling light, or to be wall

Panel line, linkable case

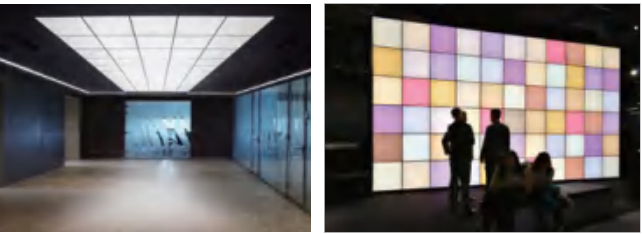

Panel ceiling

Panel wall



Linear Narrow frame pendant light fixture

Narrow frame track light

Flexible Installation Type



Suspending to be different shape fixture



Flat recessed case

Track light accessory

Linear Decoration

Linear Frameless Panel Application



Linkable to be linear light and could also used as linear light

Suspending case



3D direction, real frameless Panel


Linear Narrow frame pendant light fixture



Track light accessory





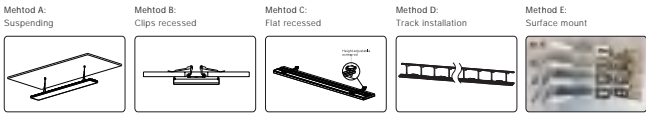








Frameless track light case

Flexible Installation Type

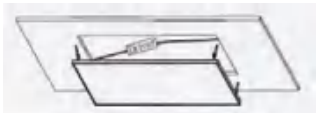

Accessory

Installation

Model No.	Discription	Picture
DW-SUKIT 1	2pc 1m cable with accessory, suspension kit for LED panel light	 
DW-SUKIT 2	4pc 1m cable with accessory, suspension kit for LED panel light	 
DW-SUKIT 3	4pc 1m cable with accessory, suspension kit for big size LED panel light	 
DW-SURFACE3030	Surface mount kit for 295x295mm panel	 
DW-SURFACE3060	Surface mount kit for 295x595mm panel	
DW-SURFACE6060	Surface mount kit for 595x595mm panel	
DW-SURFACE6262	Surface mount kit for 620x620mm panel	
DW-SURFACE30120	Surface mount kit for 295x1195mm panel	
DW-FSXX	Surface mount kit for frameless, Narrow framless panel	
DW-ASXX	Easy surface mount kit for all the panels	
DW-SP1	Recess mount clips for classic, Ugr<19 and ip65 led panel	 
DW-SP2	Recess mount clips for linear narrow Frame and frameless led panel	 
DW-SP3	Adjustable recess mount bracker for Linear Narrow frame and Frameless led panel, make panel and ceiling at same level	 
DW-Tunel	Easy tunel track accessory for Linear Narrow frame and Frameless led panel	 

Accessory

LED Driver

Type	Model No.	Discription	
NON-DIMMABLE DRIVER	Lifud Standard 450mA	match with 18W led panel, non-dimmable, 5 years warranty	
	Lifud Standard 900mA	match with 36W led panel, non-dimmable, 5 years warranty	
	Lifud Standard 1200mA	match with 48W led panel, non-dimmable, 5 years warranty	
	Lifud Standard 1500mA	match with 60W led panel, non-dimmable, 5 years warranty	
	BOKE 450mA	match with 18W led panel, non-dimmable, flicker-free, 5 years warranty	
	BOKE 900mA	match with 36W led panel, non-dimmable, flicker-free, 5 years warranty	
	BOKE 1200mA	match with 48W led panel, non-dimmable, flicker-free, 5 years warranty	
	BOKE 1400mA	match with 55W led panel, non-dimmable, flicker-free, 5 years warranty	
	Lifud Slim 450mA	match with 18W Linear Narrow frame and Frameless panel, non-dimmable, 5 years warranty	
	Lifud Slim 700mA	match with 24W Linear Narrow frame and Frameless panel, non-dimmable, 5 years warranty	
	Lifud Slim 900mA	match with 36W Linear Narrow frame and Frameless panel, non-dimmable, 5 years warranty	
	Lifud Slim 1200mA	match with 48W Linear Narrow frame and Frameless panel, non-dimmable, 5 years warranty	
IP65 DRIVER	BOKE IP65 900mA	match with 36W IP65 led panel, flicker-free, 3 years warranty	
	BOKE IP65 1200mA	match with 48W IP65 led panel, flicker-free, 3 years warranty	
TRIAC DIMMABLE DRIVER	BOKE Traic 900mA	match with 36W led panel, traic dimmable, flicker-free, 5 years warranty	
	BOKE Traic 1200mA	match with 48W led panel, traic dimmable, flicker-free, 5 years warranty	
0-10V DIMMABLE DRIVER	Lifud 0-10V 900mA	match with 36W led panel, 0-10V dimmable, flicker-free, 5 years warranty	
	Lifud 0-10V 1200mA	match with 48W led panel, 0-10V dimmable, flicker-free, 5 years warranty	
1-10V DIMMABLE DRIVER	HYTRONIC 1-10V	match with 48W CCT tunable panel, 1-10V dimmable, 5 years warranty	
DALI DIMMABLE DRIVER	BOKE DALI 900mA	match with 36W led panel, DALI dimmable, flicker-free, 5 years warranty	
	BOKE DALI 1200mA	match with 48W led panel, DALI dimmable, flicker-free, 5 years warranty	
	MeanWell DALI 900mA	match with 36W led panel, DALI dimmable, flicker-free, 5 years warranty	
	MeanWell DALI 1400mA	match with 55W led panel, DALI dimmable, flicker-free, 5 years warranty	
EMERGENCY PACK	Emergency pack 36W	Emergency pack for 36W led panel light, 30% light 3 hour 12W	
	Emergency pack 48W	Emergency pack for 48W led panel light, 30% light 3 hour 16W	